


Seating/Collar Options (all shown fitted to 47 series Plate)


Flush Seating Option
(Face fixed & Blind Bolt fixed Plates only)

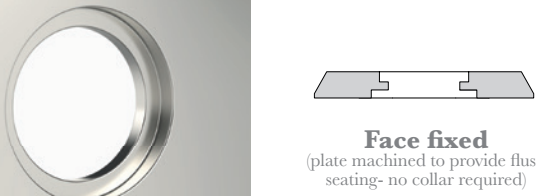

Face fixed
(plate machined to provide flush seating- no collar required)

▲ type **G** as supplied with Face Fixed Plates


Flush Collar Option
(Concealed fix Plates only)

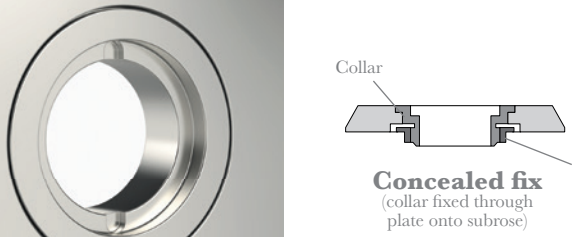

Concealed fix
(collar fixed through plate onto subrose)

▲ type **G** as supplied with Concealed Fix Plates


Raised Collar Options (available for Face fixed, Blind Bolt fixed & Concealed fix Plate designs)



Face/Blind Bolt fixed
collar attached directly to face fixed plate

Concealed fix
(collar fixed through plate onto subrose)


▲ type **F**



Face/Blind Bolt fixed
collar attached directly to face fixed plate

Concealed fix
(collar fixed through plate onto subrose)


▲ type **J**



Face/Blind Bolt fixed
collar attached directly to face fixed plate

Concealed fix
(collar fixed through plate onto subrose)


▲ type **K**



Face/Blind Bolt fixed
collar attached directly to face fixed plate

Concealed fix
(collar fixed through plate onto subrose)

▲ type **L**

































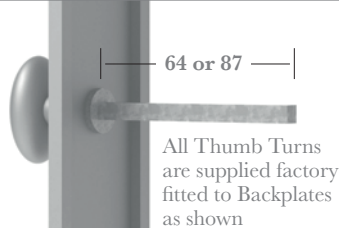
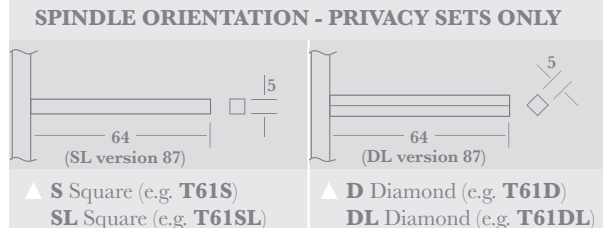


Face/Blind Bolt fixed
collar attached directly to face fixed plate

Concealed fix
(collar fixed through plate onto subrose)

































▲ type **M**


Thumb Turn Options for Backplates

					
▲ T51		▲ T61		▲ T65	
					
▲ T53		▲ T66		▲ T54	
					
▲ T52		▲ T62		▲ T68	
					
▲ T55 30(H) x 17(W) x 27(P) T72 25(H) x 13(W) x 21(P)		▲ T56 30(H) x 17(W) x 27(P) T73 25(H) x 13(W) x 21(P)		▲ T63	
					
▲ T57		▲ T58		▲ T69	
		 <p>All Thumb Turns are supplied factory fitted to Backplates as shown</p>		<p>SPINDLE ORIENTATION - PRIVACY SETS ONLY</p>  <p>▲ S Square (e.g. T61S) SL Square (e.g. T61SL)</p> <p>▲ D Diamond (e.g. T61D) DL Diamond (e.g. T61DL)</p>	
▲ T92					

If your Turn is to be used along with a Coin Release AND the door thickness is between 66mm and 90mm thick you will need to order the SL or DL version.

Thumb Turn Options for Backplates

					
▲ T59		▲ T60		▲ T75	
					
computer generated image		▲ T74		▲ T77	
					
▲ T89		▲ T67		▲ T71	
					
▲ T86		▲ T87		▲ T88	
					
▲ T79 38(H) x 21(W) x 26(P) T78 30(H) x 17(W) x 24(P)		▲ T82 32(A/F) x 30(P) T81 25(A/F) x 25(P)		▲ T84 32(A/F) x 28(P) T83 25(A/F) x 23(P)	
					
▲ T64					

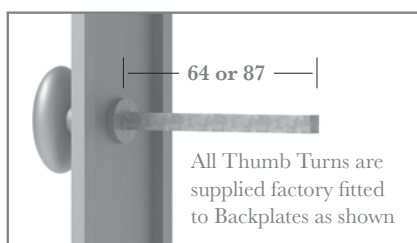

SPINDLE ORIENTATION - PRIVACY SETS ONLY



▲ S Square (e.g. T61S)
SL Square (e.g. T61SL)










▲ D Diamond (e.g. T61D)
DL Diamond (e.g. T61DL)

If your Turn is to be used along with a Coin Release AND the door thickness is between 66mm and 90mm thick you will need to order the SL or DL version.


Swing Cover Options (for Keyholes & Releases)

					
▲ R04 32Ø x 40 high	▲ R05 32Ø x 40 high	▲ R06 32Ø x 40 high	▲ R07 32Ø x 40 high	▲ R08 32Ø x 40 high	▲ R17 32Ø x 40 high
					
▲ R26 31Ø x 40 high	▲ R12 32Ø	▲ R13 32Ø	▲ R09 40 x 28	▲ R16 45 x 25	▲ R25 45 x 24
 square edge design	 round edge design				
▲ R14 50 x 20 R24 40 x 20	▲ R11 50 x 20 R21 40 x 20	▲ R19 50 x 19 R20 40 x 19	▲ R27 50 x 19 R28 40 x 19	▲ R29 50 x 19 R30 40 x 19	▲ R35 50 x 19 R36 40 x 19
					 not available as coin release or keyhole cover
▲ R10 40 x 20	▲ R23 40 x 25	▲ R31 32 A/F	▲ R32 32 A/F	▲ R15 56 x 27	▲ R18 19 x 11
 not available as keyhole cover	 not available as keyhole cover	A/F = dimension across flats			
▲ R33 24 x 24	▲ R34 34 x 34	<div data-bbox="667 1480 1337 1727" style="border: 1px solid black; padding: 5px;">  <p>Cover Coin Release In addition to our standard release hole, our Swing Covers are also available with a Coin Release, use code 'CR' in place of 'R' for all Covers shown above eg. CR28.</p> </div>			


Coin/Release Options

			 indicator: red/green	 square edge design	 round edge design	 cover cap design
▲ R00 9.5Ø	▲ R01 11Ø	▲ R02 20Ø	▲ R03 11Ø	▲ R37 19Ø (10.5Ø hole)	▲ R38 19Ø (10.5Ø hole)	▲ R39 19Ø (10.5Ø hole)

US Entry Plates - Cylinder Options

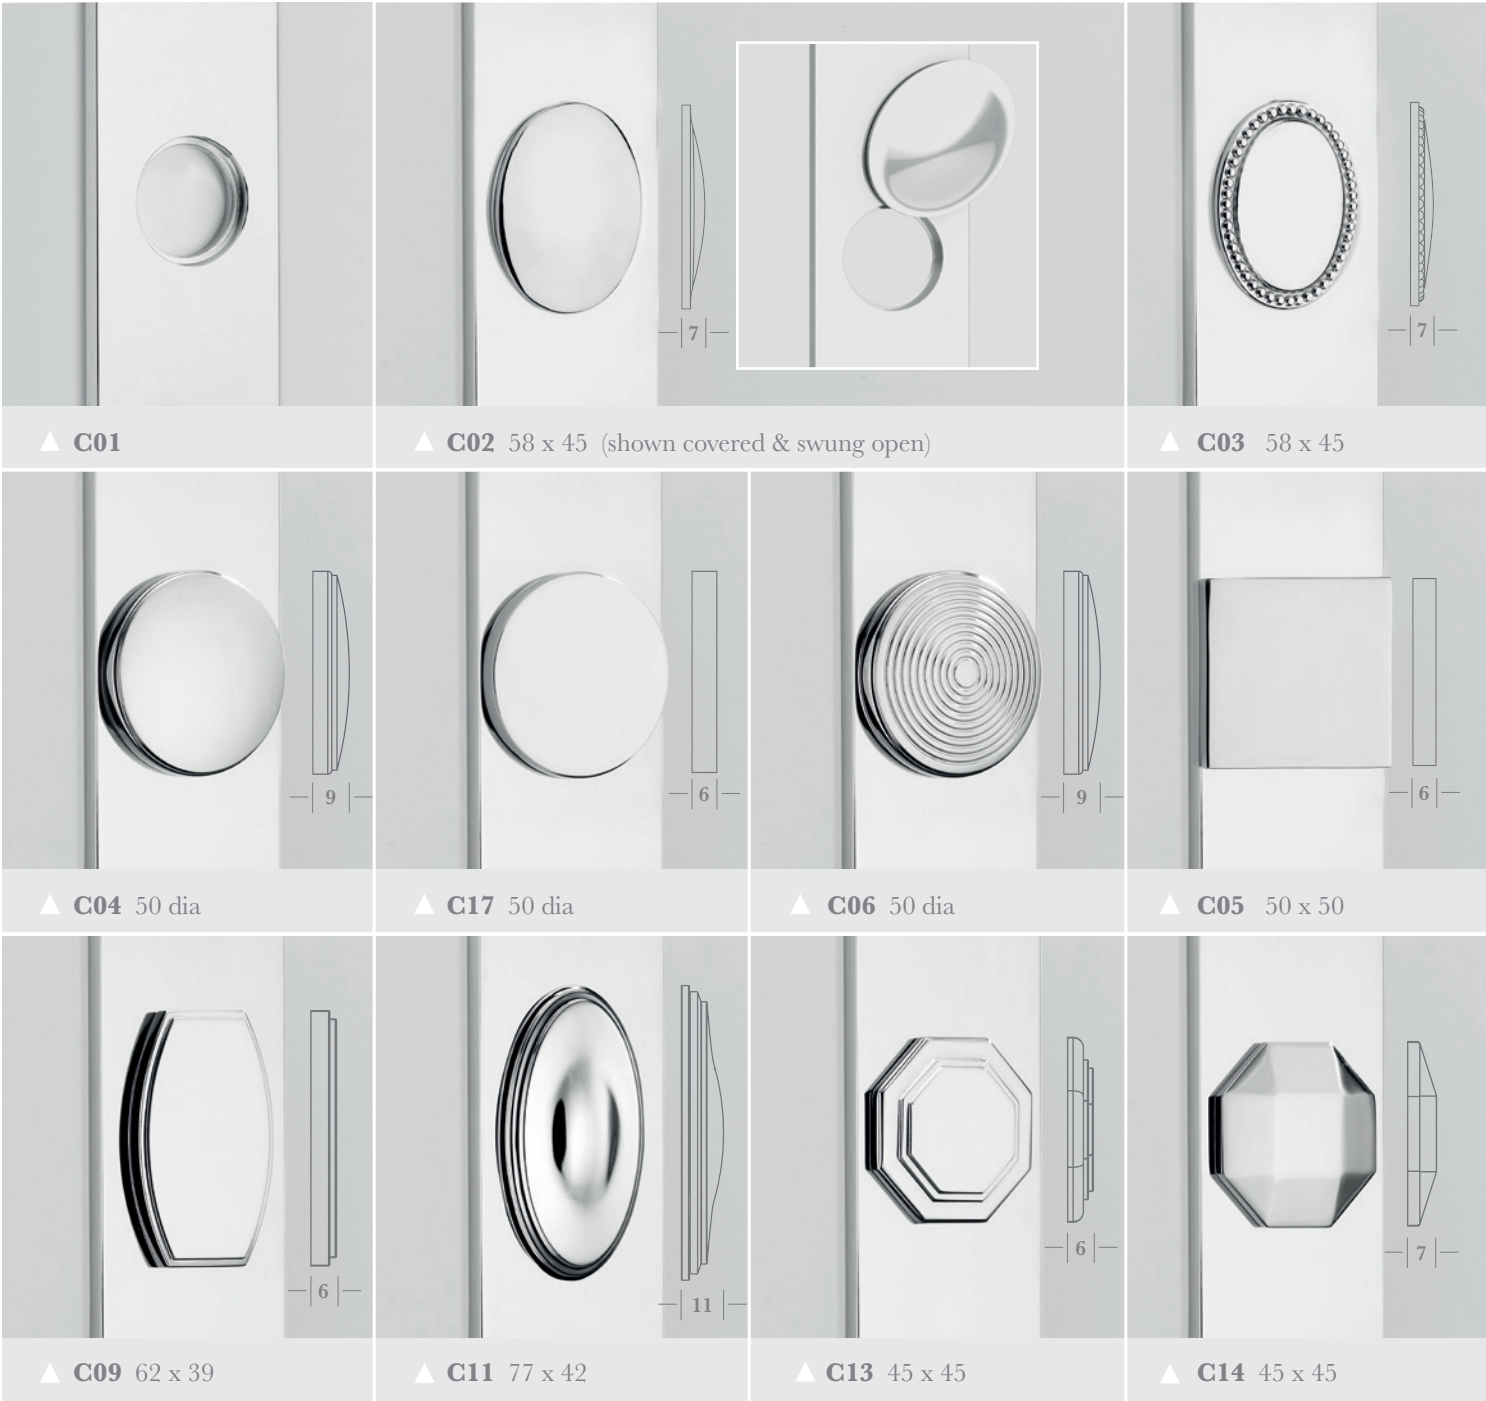


CYLINDER OPTIONS									
	32 Series	47 Series	49 Series	59 Series	60 Series	66 Series	67 Series	68 Series	87 Series
	MINIMUM PLATE WIDTH (mm)								
C01	44	44	44	44	54	44	54	54	54
C02, C03 C13, C14	54	54	54	54	64	54	64	64	54
C04, C05 C06, C17	54	64	54	64	64	64	64	64	64
C09 C11	44	44	44	44	64	54	54	54	54



Plates machined to accept US standard cylinders

US Entry Plates - Cylinder Options

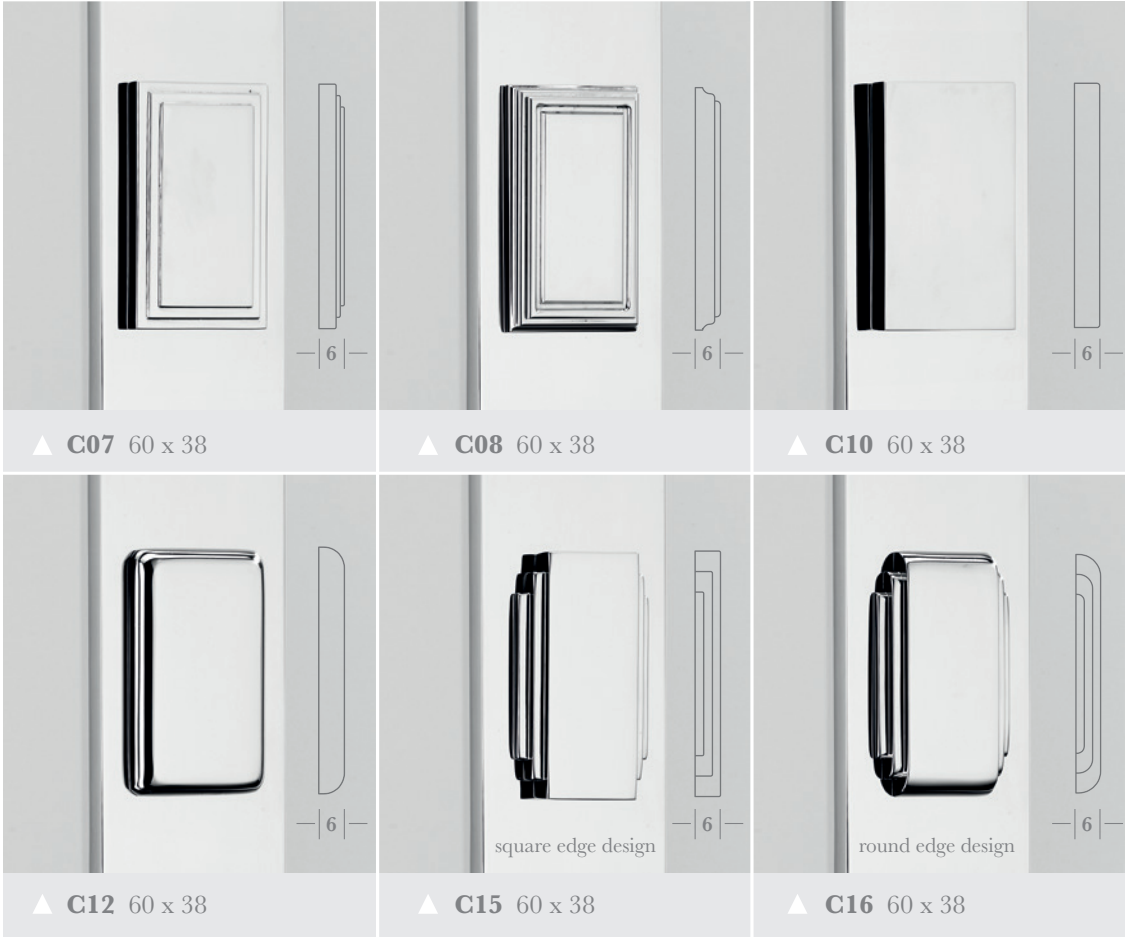


CYLINDER OPTIONS									
	32 Series	47 Series	49 Series	59 Series	60 Series	66 Series	67 Series	68 Series	87 Series
	MINIMUM PLATE WIDTH (mm)								
ALL PLATE DESIGNS	44	44	44	44	64	54	54	54	54




Plates machined to accept US standard cylinders

Lever, Knob & Thumb Turn Options

A selection of adaptors and spindles for converting standard Select Levers & Knobs: for use on ANSI 161 preparation pre-bored doors; in conjunction with Rim Locks; and to work with Thumb Turns.

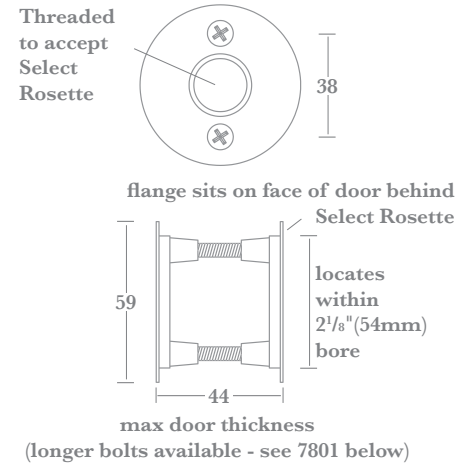

- ▲ **7800 Pre-Bored Door Adaptor** (for use with 2 1/8" bore - ANSI 161 preparation)
- 7801 Optional Long Screw Pack** (pack of 2pcs - M5 x 50mm machine screws for adapting 7800 to cater for doors between 45mm and 60mm thick)

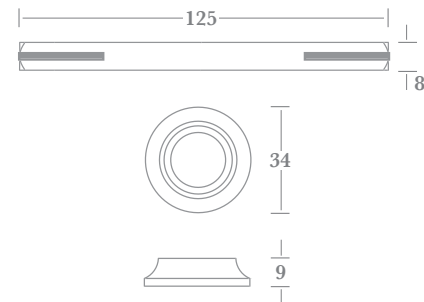

- ▲ **7805 Rim Lock Seating Collar & Spindle** - 90mm maximum combined thickness of door leaf & rim lock (custom length spindles available made to order)

Fixings


Pre-Bore Adaptors supplied with alignment collars and M5 x 35mm machine screws to suit doors between 32mm and 44mm thick.

How to Order

- 1) select PRODUCT (e.g. **7805**)
- 2) 7805 only - add FINISH (e.g. **7805PC**).

Finishes



7805 Collar - See our price list or website for finish availability.

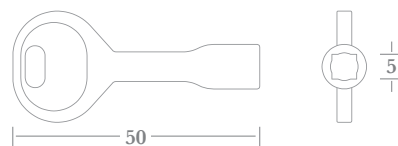

- ▲ **7901KEY Release Key**



- ▲ **0151 5-8mm Converter Sleeve**

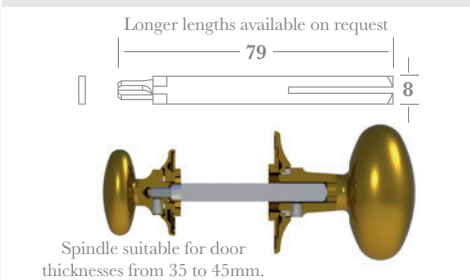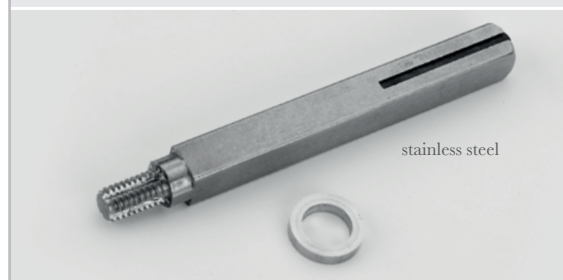


- ▲ **7819 Closet Spindle** - designed to connect Thumb Turns in sections ST7 & DF6 (pages 040 & 050) with Allart Select Door Levers & Knobs (ST1&2)

Lever & Knob Mounts & Spindles



▲ 7810 Subrose for solid doors - (included as standard with all concealed fix rosettes & backplates).

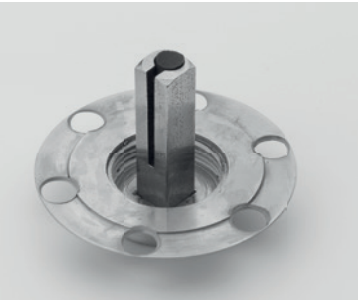

▲ 7811 Fix Dead Dummy Mount (solid doors) - heavy duty version for doors fitted with a door control and/or seals. For single lever/knob, 2 required for pairs of levers/knobs.



▲ 7813 Fix Dead Dummy Mount (solid doors) - for single lever/knob, 2 required for pairs of levers/knobs.








▲ 7814 Fix Dead Dummy Mount Set (solid doors) - alternative mounting for pairs of levers/knobs using existing spindle.



▲ 9001 Taylor's Spindle - for use with face fixed rosettes in section ST3.

NB. Not suitable for Ø44mm Roses.

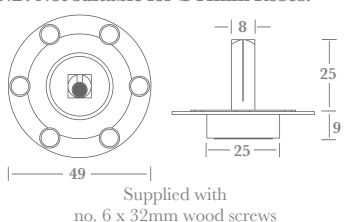

▲ 7815 Lockpoint Spindle




	A	B	C	D	E
L (length)	75	96	110	125	155
Door Thickness	5-30	25-51	35-64	50-80	80-110



zinc plated steel

▲ 7818 Single Side Operating Spindle for use on applications where operation of lever/knob is required on one door face only. Suitable for doors 35-60mm thick.




▲ 7806 Access Control (AC) Spindle Horizontal bolt through version



▲ 7807 Access Control (AC) Spindle Vertical bolt through version

Designed to provide a strong and secure fixing for the outside fixed dead (dummy) Lever/Knob when used in conjunction with a Night Latch/Electric Strike/Key Fob. Typical applications are hotel bedroom doors and high-end residential apartment entrance doors.



Supplied with no. 6 x 19mm wood screws.



▲ 7816 Lockpoint Swivel Spindle - for use with split follower locks



	A	B	C
L (length)	96	110	125
Door Thickness	25 - 51	40 - 64	50 - 80

	A	B	C	D
L (length)	103	113	123	133
Door Thickness Range	44 to 53	54 to 63	64 to 73	74 to 84
To suit standard Door Thicknesses	44 & 51	54 & 57	Custom	

