

Backplates - Latch (Passage) - Face Fixed

66 Series Plates with type J collar illustrated




Face Fixed Plates can be supplied with Allart Select Levers or Knobs attached (circlip fixed).


OPTIONS:
Plate designs - ST4
Seating/Collars - ST6:010
Lever/Knob designs - ST1 & ST2



(A width shown)

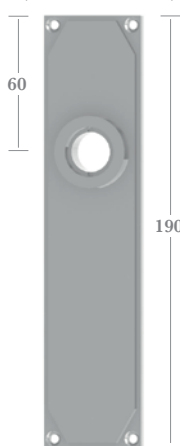


(B width shown)

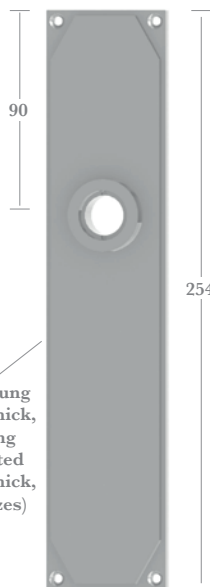

Unsprung
6mm thick,
Spring
Assisted
9mm thick,
(all sizes)

(C width shown)

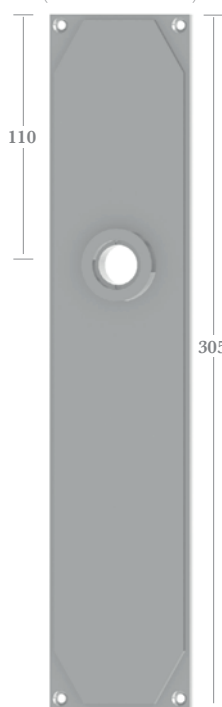

(D width shown)

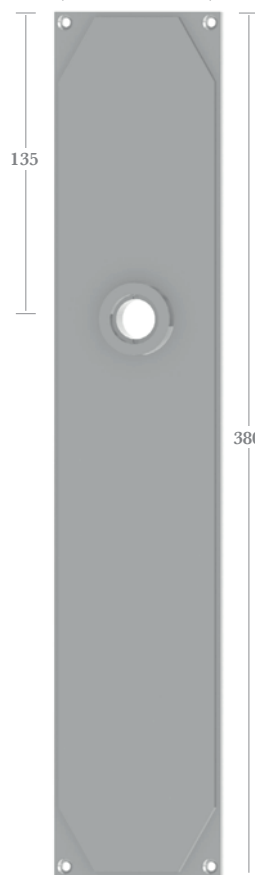


Plate Length	190mm	254mm	305mm	380mm
Length & Function Code	--61	--71	--81	--91

All Plate Lengths are available in the following widths:

Plate Width	38mm	44mm	54mm	64mm	76mm
Code	AA*	A	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with finish matched no.6 wood screws, alignment collars and installation instructions. An 8mm x 110mm Stainless Steel Lockpoint Spindle and grubscrews are supplied when Lever/Knob attached.

How to Order

Split Finish Sets - order as singles

Pair of Plates with Levers/Knobs attached:

- 1) select PLATE DESIGN (e.g. 66 series)
- 2) add LENGTH & FUNCTION code (e.g. 6671)
- 3) add SPRING ASSIST if required, see below (e.g. 6671S)
- 4) add WIDTH code (e.g. 6671S/B)
- 5) add COLLAR DESIGN (e.g. 6671S/B/J)
- 6) add FINISH (e.g. 6671S/B/J/PN)
- 7) add LEVER/KNOB code (e.g. 6671S/B/J/PN/7774).

For FIX DEAD add FDS
(e.g. 6671B/J/PN/7774/FDS).

Single Plate with Lever/Knob attached:

For SINGLE PLATE with LEVER add HANDING LH or RH (e.g. 6671S/B/J/PN/7774RH).

For SINGLE PLATE with KNOB add /H
(e.g. 6671B/J/PN/7621/H).

For FIX DEAD single plate add FD
(e.g. 6671B/J/PN/7621/H/FD
or 6671B/J/PN/7774RH/FD).

Pair of Plates Only: (not available Spring Assisted)

- 1) select PLATE DESIGN (e.g. 66 series)
- 2) add LENGTH & FUNCTION code (e.g. 6671)
- 3) add WIDTH code (e.g. 6671/B)
- 4) add COLLAR DESIGN (e.g. 6671/B/J)
- 5) add FINISH (e.g. 6671/B/J/PN).

For FIX DEAD add FDS (e.g. 6671/B/J/PN/FDS).

Single Plates Only: (not available Spring Assisted)

For SINGLE PLATE add H (e.g. 6671/B/J/PN/H).

For FIX DEAD single plate add FD
(e.g. 6671B/J/PN/H/FD).

HANDING - Single Lever



LEVER LOW CONFIGURATION

To order Plates with Levers attached for Lever Low application add **X** into code after PLATE DESIGN (e.g. 68X67...)



NB. Plates Only can simply be reversed for Lever Low application.

FIX DEAD DUMMY OPTION



Plates with Lever/Knob attached - achieved by custom machining both the Plate & Lever/Knob, then fixing together with a lockbolt.

Plates Only - supplied with a 7813 Fix Dead Dummy Mount.




SPRING ASSISTED PLATES (9mm thick). These require a raised collar (G seating is not possible) see page ST5:210 for illustration.

Backplates - Latch (Passage) - Concealed Fix

49 Series Plates with type J collar illustrated

Concealed Fix Plates cannot be supplied with Levers or Knobs attached. Door Levers & Knobs are ordered separately - see sections ST1 & ST2.

OPTIONS:
Plate designs - ST4
Seating/Collars - ST6:010

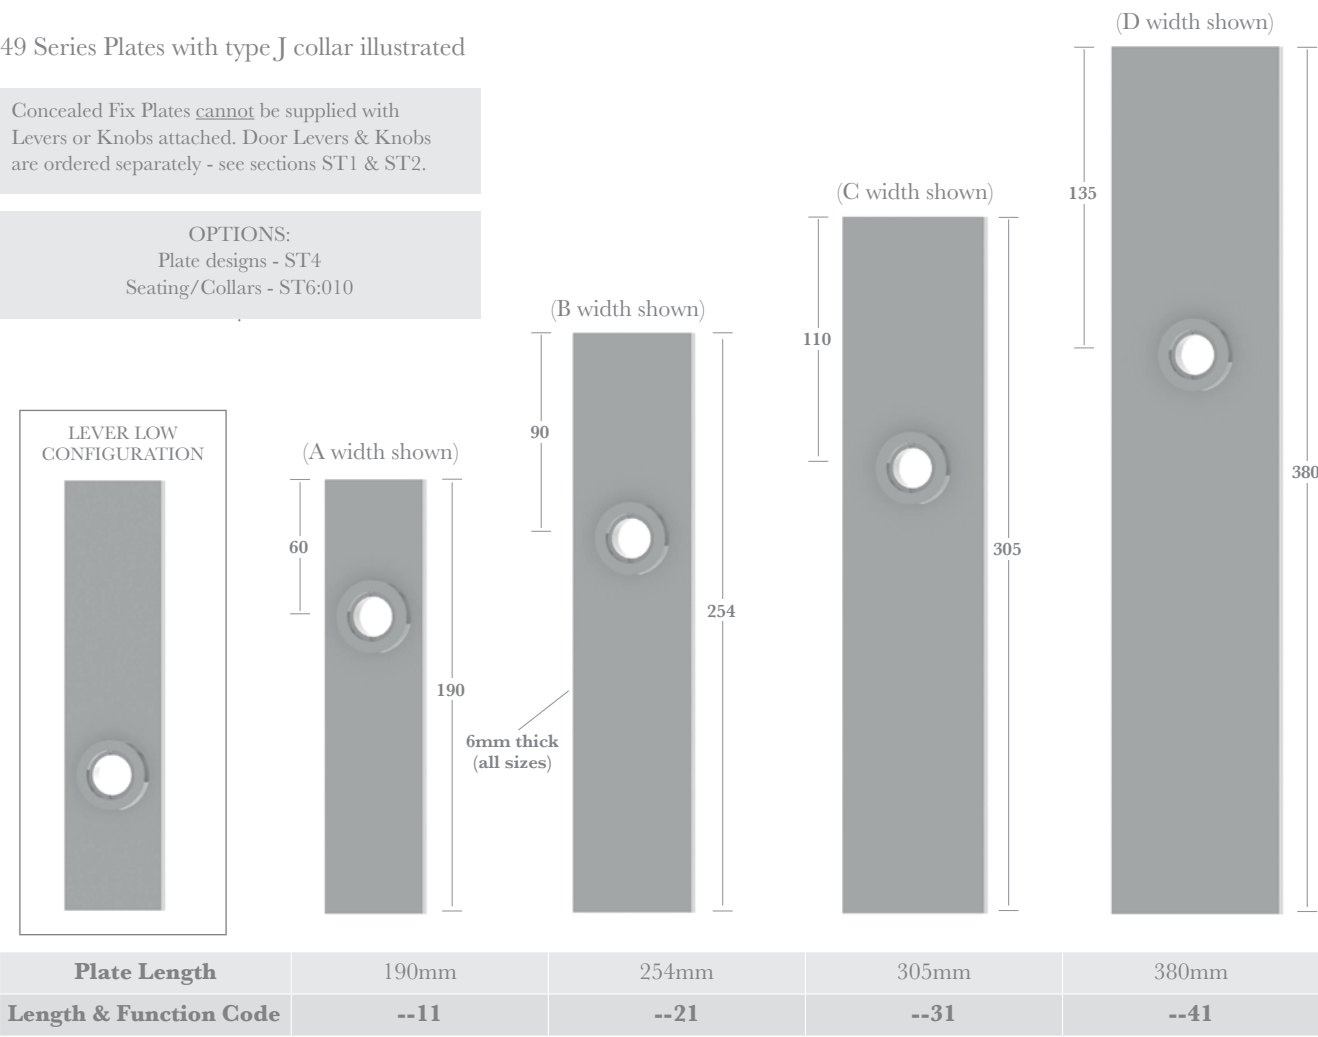


All Plate Lengths are available in the following widths:

Plate Width	38mm	44mm	54mm	64mm	76mm
Code	AA*	A	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with subroses, no.4 x 13mm wood screws, alignment collars and installation instructions.
Fix Dead Plates are supplied with 7813 mounts in place of standard subroses - see page ST6:080 for details.

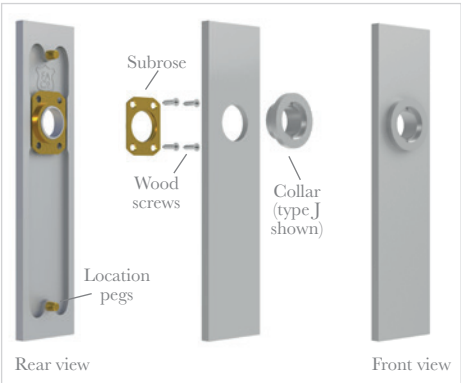

How to Order Split Finish Sets - order as singles

Pair of Plates:

- 1) select PLATE DESIGN (e.g. 49 series)
 - 2) add LENGTH & FUNCTION code (e.g. 4911)
 - 3) add WIDTH code (e.g. 4911A)
 - 4) add COLLAR DESIGN (e.g. 4911A/J)
 - 5) add FINISH (e.g. 4911A/J/SN)
- For FIX DEAD pair of plates add FDS (e.g. 4900B/J/PB/FDS).

Single Plate only:

For SINGLE PLATE add/H (e.g. 4911A/J/SN/H).
For FIX DEAD single plate add FD (e.g. 4911B/J/PB/H/FD).

LEVER LOW CONFIGURATION

Latch (Passage) Backplates can be ordered as shown and reversed for Lever Low application

7813

7813 (shown fitted)


FIX DEAD DUMMY OPTION

SUBROSES SUPPLIED

ALIGNMENT COLLARS SUPPLIED

Backplates - Keyhole - Face Fixed

59 Series Plates with type K collar illustrated (and R06 Cover where shown)



Face Fixed Plates can be supplied with Allart Select Levers or Knobs attached (circlip fixed).

OPTIONS:
Plate designs - ST4
Seating/Collars - ST6:010
Swing Covers - ST6:040
Lever/Knob designs - ST1 & ST2

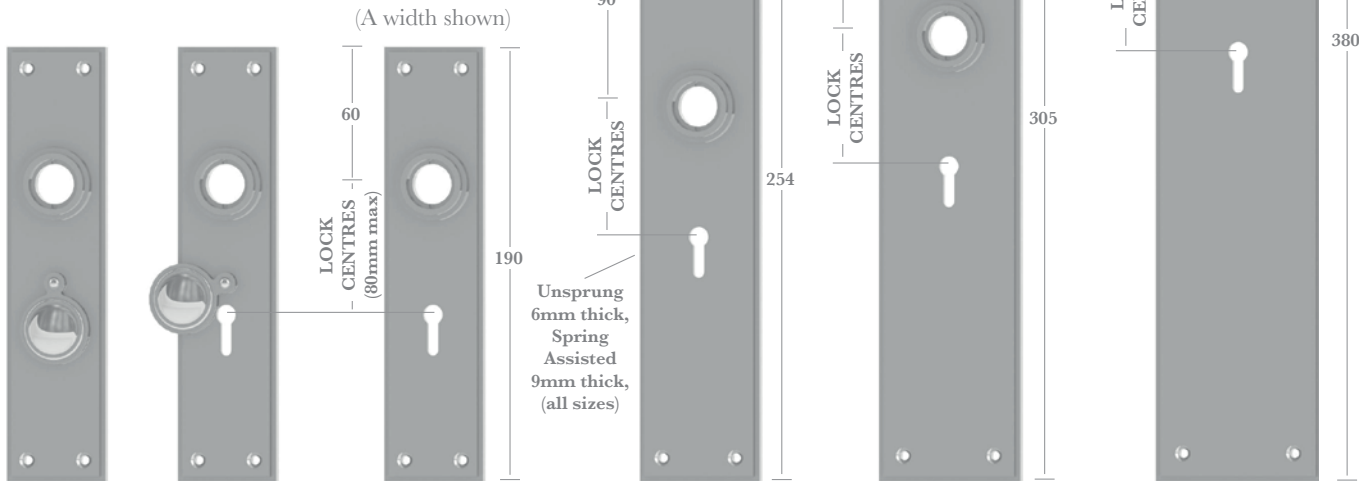


Plate Length	190mm	254mm	305mm	380mm
Keyhole only	--62	--72	--82	--92
Keyhole with Cover	--63	--73	--83	--93

All Plate Lengths are available in the following widths:

Plate Width	38mm	44mm	54mm	64mm	76mm
Code	AA*	A	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with finish matched no.6 wood screws, alignment collars and installation instructions. An 8mm x 110mm Stainless Steel Lockpoint Spindle and grubscrews are supplied when Lever/Knob attached.

How to Order - Keyhole only

Pair of Plates with Levers/Knobs attached:

- 1) select PLATE DESIGN (e.g. **59** series)
- 2) add LENGTH & FUNCTION code (e.g. **5972**)
- 3) add SPRING ASSIST if required (e.g. **5972S**)
- 4) add WIDTH code (e.g. **5972S/B**)
- 5) add LOCK CENTRES (e.g. **5972S/B57**)
- 6) add COLLAR DESIGN (e.g. **5972S/B57K**)
- 7) add FINISH (e.g. **5972S/B57K/PN**)
- 8) add LEVER/KNOB code (e.g. **5972S/B57K/PN/7774**).

Single Plate with Levers/Knobs attached:

For SINGLE PLATE with LEVER add HANDING LH or RH (e.g. **5972S/B57K/PN/7774RH**).

For SINGLE PLATE with KNOB add/H (e.g. **5972B57K/PN/7621/H**).

Pair of Plates only: (not available Spring Assisted)

- 1) select PLATE DESIGN (e.g. **59** series)
- 2) add LENGTH & FUNCTION code (e.g. **5972**)
- 3) add WIDTH code (e.g. **5972/B**)
- 4) add LOCK CENTRES (e.g. **5972/B57**)
- 5) add COLLAR DESIGN (e.g. **5972/B57K**)
- 6) add FINISH (e.g. **5972/B57K/PN**).

Single Plate only:

For SINGLE PLATE add/H (e.g. **5972B57K/PN/H**).

How to Order - Keyhole with Cover

Pair of Plates with Levers/Knobs attached:

- 1) select PLATE DESIGN (e.g. **59** series)
- 2) add LENGTH & FUNCTION code (e.g. **5973**)
- 3) add SPRING ASSIST if required (e.g. **5973S**)
- 4) add WIDTH code (e.g. **5973S/B**)
- 5) add LOCK CENTRES (e.g. **5973S/B57**)
- 6) add COLLAR DESIGN (e.g. **5973S/B57K**)
- 7) add COVER code (e.g. **5973S/B57K/R06**)
- 8) add FINISH (e.g. **5973S/B57K/R06/PN**)
- 9) add LEVER/KNOB code (e.g. **5973S/B57K/R06/PN/7774**).

Single Plate with Levers/Knobs attached:

For SINGLE PLATE with LEVER add HANDING LH or RH (e.g. **5973S/B57K/R06/PN/7774RH**).

For SINGLE PLATE with KNOB add/H (e.g. **5973B57K/R06/PN/7621/H**).

Pair of Plates only: (not available Spring Assisted)

- 1) select PLATE DESIGN (e.g. **59** series)
- 2) add LENGTH & FUNCTION code (e.g. **5973**)
- 3) add WIDTH code (e.g. **5973B**)
- 4) add LOCK CENTRES (e.g. **5973B57**)
- 5) add COLLAR DESIGN (e.g. **5973B57K**)
- 6) add COVER CODE (e.g. **5973B57K/R06**)
- 7) add FINISH (e.g. **5973B57K/R06/PN**).

Single Plate only: (not available Spring Assisted)

For SINGLE PLATE add/H (e.g. **5973B57K/R06/PN/H**).

Split Finish Sets - order as singles

SPRING ASSISTED PLATES (9mm thick). These require a **raised collar (G seating is not possible)** see page **ST5:210** for illustration.



Backplates - Keyhole - Concealed Fix

67 Series Plates with type G collar illustrated (and R24 Cover where shown)

Concealed Fix Plates **cannot** be supplied with Levers or Knobs attached. Door Levers & Knobs are ordered separately - see sections ST1 & ST2.

OPTIONS:
Plate designs - ST4
Seating/Collars - ST6:010
Swing Covers - ST6:040

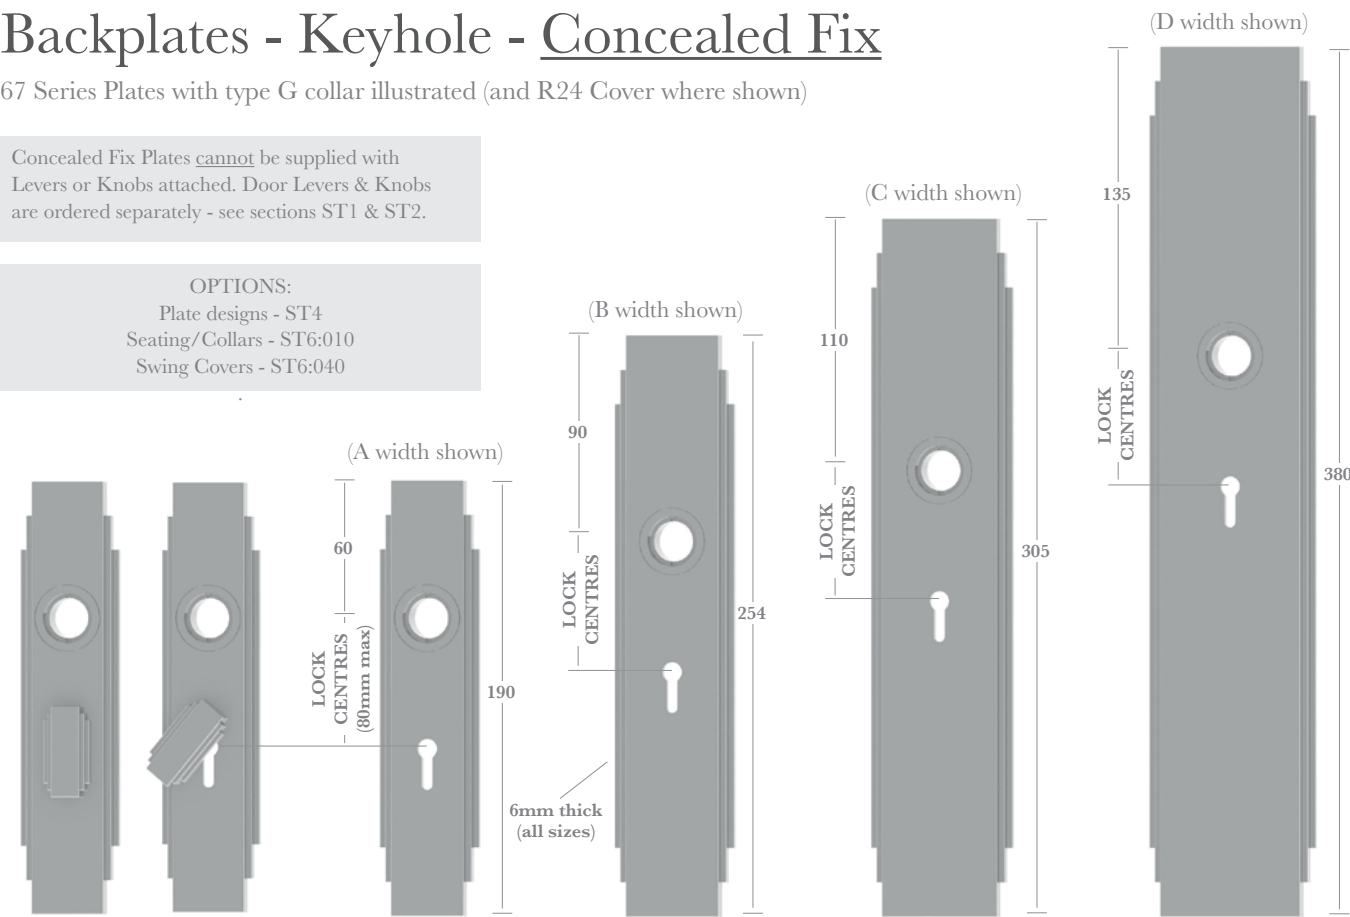


Plate Length	190mm	254mm	305mm	380mm
Keyhole only	--12	--22	--32	--42
Keyhole with Cover	--13	--23	--33	--43

All Plate Lengths are available in the following widths:


Plate Width	38mm	44mm	54mm	64mm	76mm
Code	AA*	A	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with subroses, no.4 x 13mm wood screws, alignment collars and installation instructions.

Split Finish Sets - order as singles

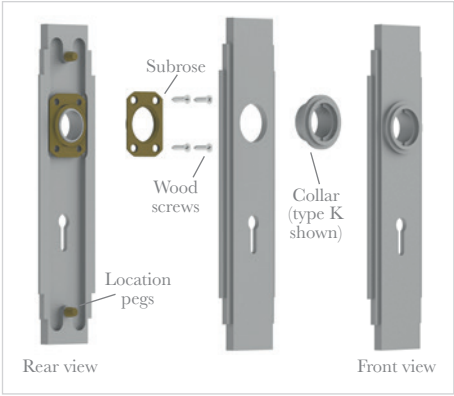

How to Order - Keyhole only

Pair of Plates:

- 1) select PLATE DESIGN (e.g. **67** series)
- 2) add LENGTH & FUNCTION code (e.g. 67**12**)
- 3) add WIDTH code (e.g. 6712**A**)
- 4) add LOCK CENTRES (e.g. 6712A**57**)
- 5) add COLLAR DESIGN (e.g. 6712A57**G**)
- 6) add FINISH (e.g. 6712A57G/**PC**).

Single Plate only:

For SINGLE PLATE add/H
(e.g. 6712A57G/PC/**H**).

How to Order - Keyhole with Cover

Pair of Plates:

- 1) select PLATE DESIGN (e.g. **67** series)
- 2) add LENGTH & FUNCTION code (e.g. 67**13**)
- 3) add WIDTH code (e.g. 6713**A**)
- 4) add LOCK CENTRES (e.g. 6713A**57**)
- 5) add COLLAR DESIGN (e.g. 6713A57**G**)
- 6) add COVER code (e.g. 6713A57G/**R24**)
- 7) add FINISH (e.g. 6713A57G/R24/**PC**).


Single Plate only:

For SINGLE PLATE add/H
(e.g. 6713A57G/R24/PC/**H**).



Backplates - Profile Cylinders - Face Fixed

47 Series Plates with type F collar illustrated



OPTIONS:
Plate designs - ST4
Seating/Collars - ST6:010
Lever/Knob designs - ST1 & ST2

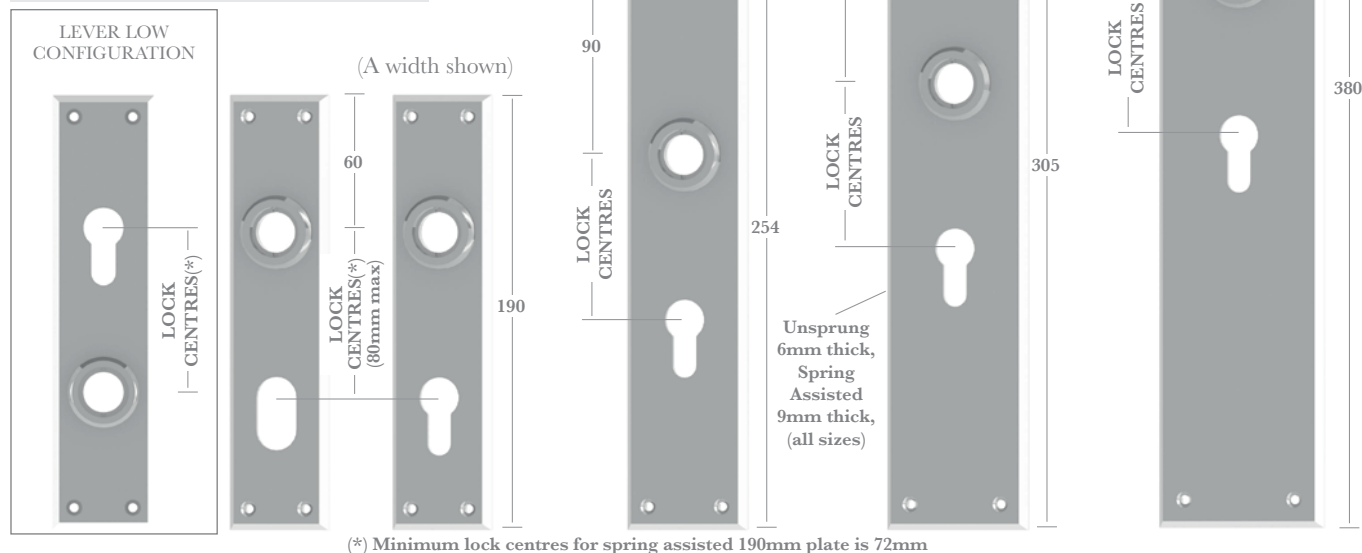


Plate Length	190mm	254mm	305mm	380mm
Oval Cylinder [†]	--64	--74	--84	--94
Euro Cylinder	--65	--75	--85	--95

[†] cutout for standard 32 x 18mm oval cylinder (larger cutouts available upon request)

All Plate Lengths are available in the following widths:

Plate Width	38mm	44mm	54mm	64mm	76mm
Code	AA*	A	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with finish matched no.6 wood screws, alignment collars and installation instructions. An 8mm x 110mm Stainless Steel Lockpoint Spindle and grubscrews are supplied when Lever/Knob attached.

How to Order

Split Finish Sets - order as singles

Pair of Plates with Levers/Knobs attached:

- 1) select PLATE DESIGN (e.g. 47 series)
 - 2) add LENGTH & FUNCTION code (e.g. 4765)
 - 3) add SPRING ASSIST if required, see below (e.g. 4765S)
 - 4) add WIDTH code (e.g. 4765S/A)
 - 5) add LOCK CENTRES (e.g. 4765S/A72)
 - 6) add COLLAR DESIGN (e.g. 4765S/A72F)
 - 7) add FINISH (e.g. 4765S/A72F/PB)
 - 8) add LEVER/KNOB (e.g. 4765S/A72F/PB/7774).
- For FIX DEAD add FDS
(e.g. 4765S/A72F/PB/7774/FDS).

Single Plate with Lever/Knob attached:

For SINGLE PLATE with LEVER add HANDING LH or RH (e.g. 4765S/A72F/PB/7774RH).

For SINGLE PLATE with KNOB add/H (e.g. 4765A72F/PB/7621/H).

For FIX DEAD single plate add FD (e.g. 4765A72F/PB/7621/H/FD or 4765A72F/PB/7774RH/FD).



Pair of Plates Only: (not available Spring Assisted)

- 1) select PLATE DESIGN (e.g. 47 series)
 - 2) add LENGTH & FUNCTION code (e.g. 4765)
 - 3) add WIDTH code (e.g. 4765A)
 - 4) add LOCK CENTRES (e.g. 4765A72)
 - 5) add COLLAR DESIGN (e.g. 4765A72F)
 - 6) add FINISH (e.g. 4765A72F/PN).
- For FIX DEAD add FDS (e.g. 4765A72F/PN/FDS).

Single Plate Only: (not available Spring Assisted)

For SINGLE PLATE add/H (e.g. 4765A72F/PN/H).

For FIX DEAD single plate add FD (e.g. 4765A72F/PN/H/FD).

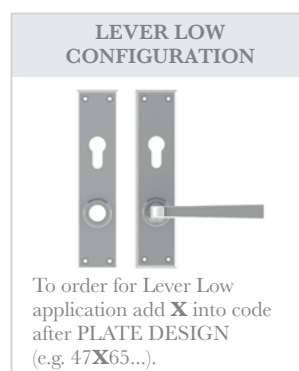

SPRING ASSISTED PLATES (9mm thick). These require a **raised** collar (G seating is not possible) see page ST5:210 for illustration.

Backplates - Profile Cylinders - Concealed Fix

32 Series Plates with type K collar illustrated

Concealed Fix Plates cannot be supplied with Levers or Knobs attached. Door Levers & Knobs are ordered separately - see sections ST1 & ST2.

OPTIONS:
Plate designs - ST4
Seating/Collars - ST6:010

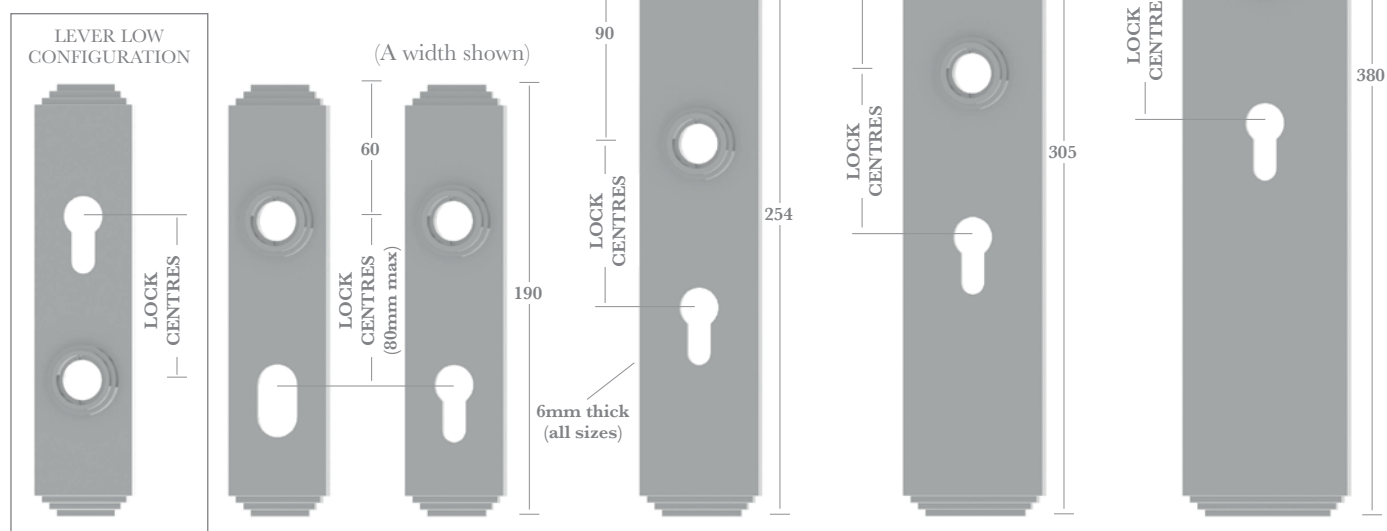


Plate Length	190mm	254mm	305mm	380mm
Oval Cylinder [†]	--14	--24	--34	--44
Euro Cylinder	--15	--25	--35	--45

[†] cutout for standard 32 x 18mm oval cylinder (larger cutouts available upon request)

All Plate Lengths are available in the following widths:


Plate Width	38mm	44mm	54mm	64mm	76mm
Code	AA*	A	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with subroses, no.4 x 13mm wood screws, alignment collars and installation instructions.

Fix Dead Plates are supplied with 7813 mounts in place of standard subroses - see page ST6:080 for details.

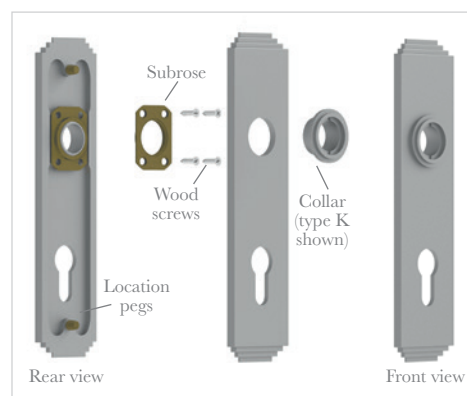

How to Order

Split Finish Sets -
order as singles

Pair of Plates:

- 1) select PLATE DESIGN (e.g. **32** series)
- 2) add LENGTH & FUNCTION code (e.g. **3225**)
- 3) add WIDTH code (e.g. 3225**A**)
- 4) add LOCK CENTRES (e.g. 3225A**72**)
- 5) add COLLAR DESIGN (e.g. 3225A72**K**)
- 6) add FINISH (e.g. 3225A72K/**PC**).

For FIX DEAD pair of plates add FDS (e.g. 3225A72K/PC/**FDS**).

Single Plate only:


For SINGLE PLATE add/H (e.g. 3225A72K/PC/**H**).

For FIX DEAD single plate add FD (e.g. 3225A72K/PC/H/**FD**).



Backplates - Privacy - Face Fixed

68 Series Plates with type G seating, T55 Turn & R21 Cover illustrated.



Face Fixed Plates can be supplied with Allart Select Levers or Knobs attached (circlip fixed).

- OPTIONS:
- Plate designs - ST4
 - Seating/Collars - ST6:010
 - Thumb Turns - ST6:020 & 030
 - Swing Covers/Coin Releases - ST6:040.
 - Lever/Knob designs - ST1 & ST2

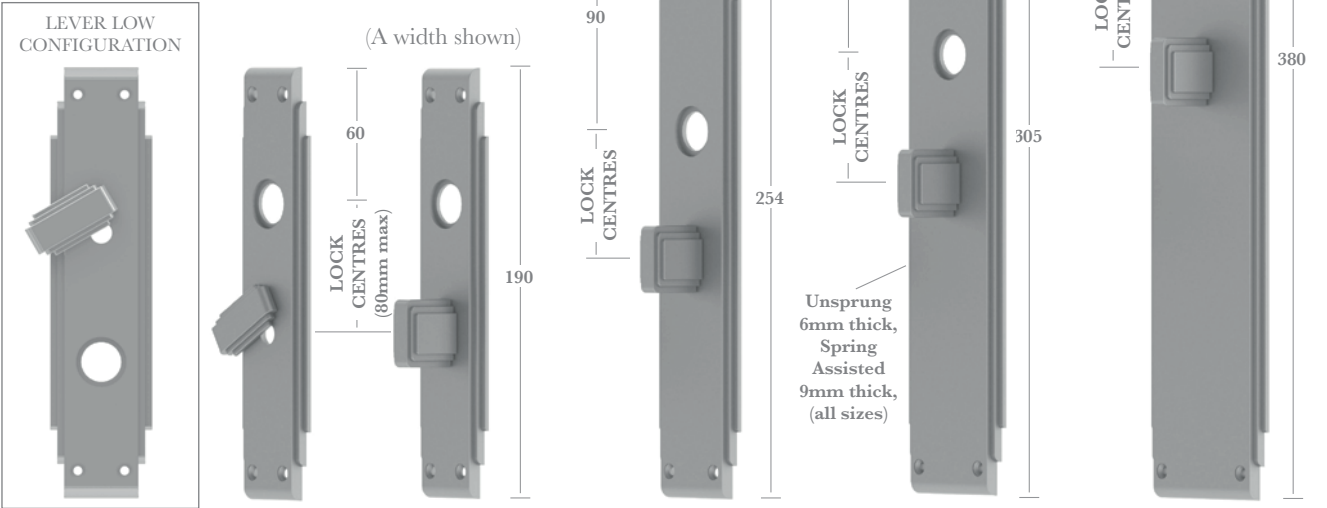


Plate Length	190mm	254mm	305mm	380mm
Length & Function Code	--67	--77	--87	--97

All Plate Lengths are available in the following widths:

Plate Width	38mm	44mm	54mm	64mm	76mm
Code	AA*	A	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with finish matched no.6 wood screws, alignment collars and installation instructions. An 8mm x 110mm Stainless Steel Lockpoint Spindle and grubscrews are supplied when Lever/Knob attached.

How to Order

Split Finish Sets - order as singles

Pair of Plates with Levers/Knobs attached:

- 1) select PLATE DESIGN (e.g. **68** series)
- 2) add LENGTH & FUNCTION code (e.g. 68**77**)
- 3) add SPRING ASSIST if required (e.g. 6877**S**)
- 4) add WIDTH code (e.g. 6877**S/B**)
- 5) add LOCK CENTRES (e.g. 6877**S/B57**)
- 6) add COLLAR DESIGN (e.g. 6877**S/B57L**)
- 7) add TURN & SPINDLE ORIENTATION code (e.g. 6877**S/B57L/T55D**)
- 8) add COVER/RELEASE code (e.g. 6877**S/B57L/T55D/R21**)
- 9) add FINISH (e.g. 6877**S/B57L/T55D/R21/PN**)
- 10) add LEVER/KNOB code (e.g. 6877**S/B57L/T55D/R21/PN/7732**)

LEVERS ONLY - add HANDING LH or RH (e.g. 6877**S/B57L/T55D/R21/PN/7732RH**).

NB. Privacy Sets with Levers fitted are handed from RELEASE side (see illustration).

Single Plate with Lever/Knob attached:

Include TURN code or COVER/RELEASE code only (e.g. 6877**S/B57L/T55D/PN/7732RH** or 6877**S/B57L/R21/PN/7732RH**).


NB. Single Plates with Levers fitted are handed as individual pieces - see handing illustration.

Pair of Plates Only: (not available Spring Assisted)

- 1) select PLATE DESIGN (e.g. **68** series)
- 2) add LENGTH & FUNCTION code (e.g. 68**77**)
- 3) add WIDTH code (e.g. 6877**B**)
- 4) add LOCK CENTRES (e.g. 6877**B57**)
- 5) add COLLAR DESIGN (e.g. 6877**B57G**)
- 6) add TURN & SPINDLE ORIENTATION code (e.g. 6877**B57G/T55D**)
- 7) add COVER/RELEASE code (e.g. 6877**B57G/T55D/R21**)
- 8) add FINISH (e.g. 6877**B57G/T55D/R21/PN**).


Single Plate Only: (not available Spring Assisted)

Include either TURN code or COVER/RELEASE code only (e.g. 6877**B57G/T55D/PN** or 6877**B57G/R21/PN**).

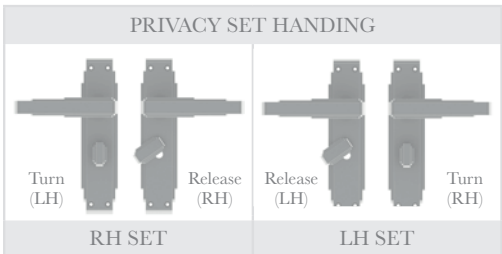

All Thumb Turns are supplied factory fitted to Backplates.

SPRING ASSISTED PLATES (9mm thick). These require a **raised collar (G seating is not possible)** see page **ST5:210** for illustration.



Backplates - Privacy - Concealed Fix

60 Series Plates with type L collar, T51 Turn, R17 Cover illustrated.

Concealed Fix Plates **cannot** be supplied with Levers or Knobs attached. Door Levers & Knobs are ordered separately - see sections ST1 & ST2.

- OPTIONS:
- Plate designs - ST4
- Seating/Collars - ST6:010
- Thumb Turns - ST6:020 & 030
- Swing Covers/Coin Releases - ST6:040.

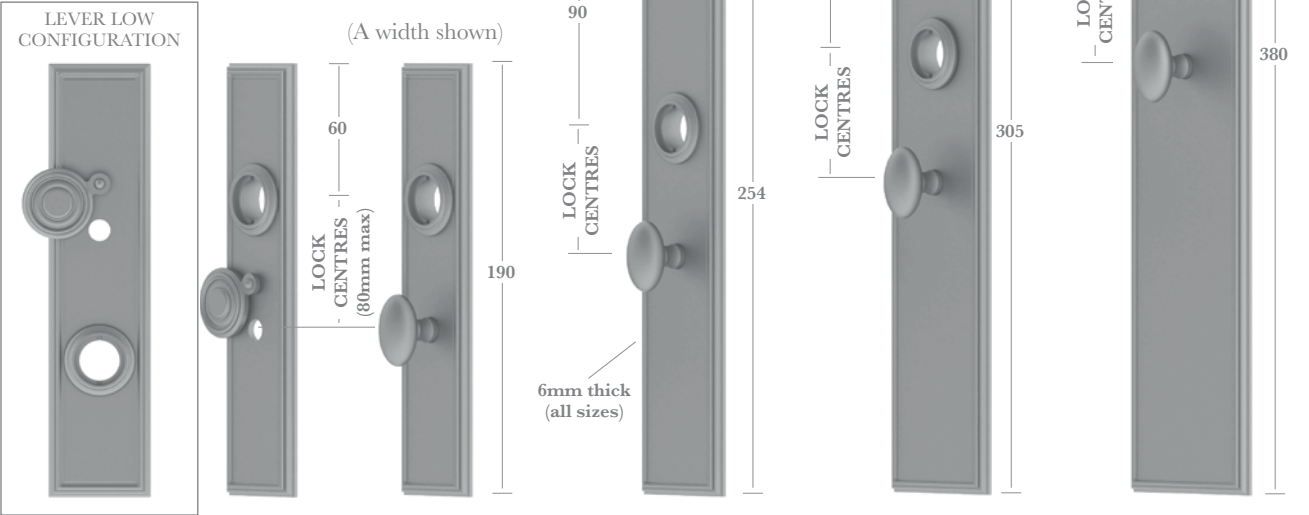


Plate Length	190mm	254mm	305mm	380mm
Length & Function Code	--17	--27	--37	--47


All Plate Lengths are available in the following widths:

Plate Width	38mm	44mm	54mm	64mm	76mm
Code	AA*	A	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with subroses, no.4 x 13mm wood screws, alignment collars and installation instructions.

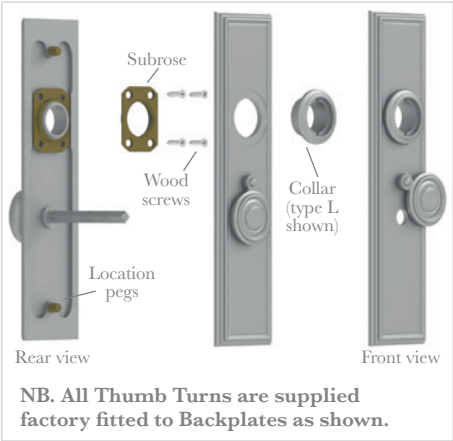

How to Order

Split Finish Sets - order as singles

Pair of Plates:

- 1) select PLATE DESIGN (e.g. **60** series)
- 2) add LENGTH & FUNCTION code (e.g. 60**17**)
- 3) add WIDTH code (e.g. 6017**B**)
- 4) add LOCK CENTRES (e.g. 6017B**57**)
- 5) add COLLAR DESIGN (e.g. 6017B57**L**)
- 6) add TURN & SPINDLE ORIENTATION code (e.g. 6017B57L/**T51S**)
- 7) add COVER/RELEASE code (e.g. 6017B57L/T51S/**R17**)
- 8) add FINISH (e.g. 6017B57L/T51S/R17/**PN**).

Single Plate only:

For SINGLE PLATE - include either TURN or COVER/RELEASE code only (e.g. 6017B57L/**T51S**/PN or 6017B57L/**R17**/PN).

LEVER LOW CONFIGURATION

To order for Lever Low application add **X** into code after PLATE DESIGN (e.g. 47**X**65...).

SUBROSES SUPPLIED

ALIGNMENT COLLARS SUPPLIED

Backplates - Accurate Mortise Locks - Face Fixed

49 Series Plates with type G seating, T67 Turn & C01 Cylinder option illustrated



Face Fixed Exterior Door Set Plates can be supplied with Allart Select Levers or Knobs attached (circlip fixed).



Designed to work in conjunction with Accurate 9000/9100 series full mortise locks

- OPTIONS:
- Plate designs - ST4
 - Seating/Collars - ST6:010
 - Thumb Turns - ST6:020 & 030
 - Cylinder Options - ST6:050
 - Lever/Knob designs - ST1 & ST2

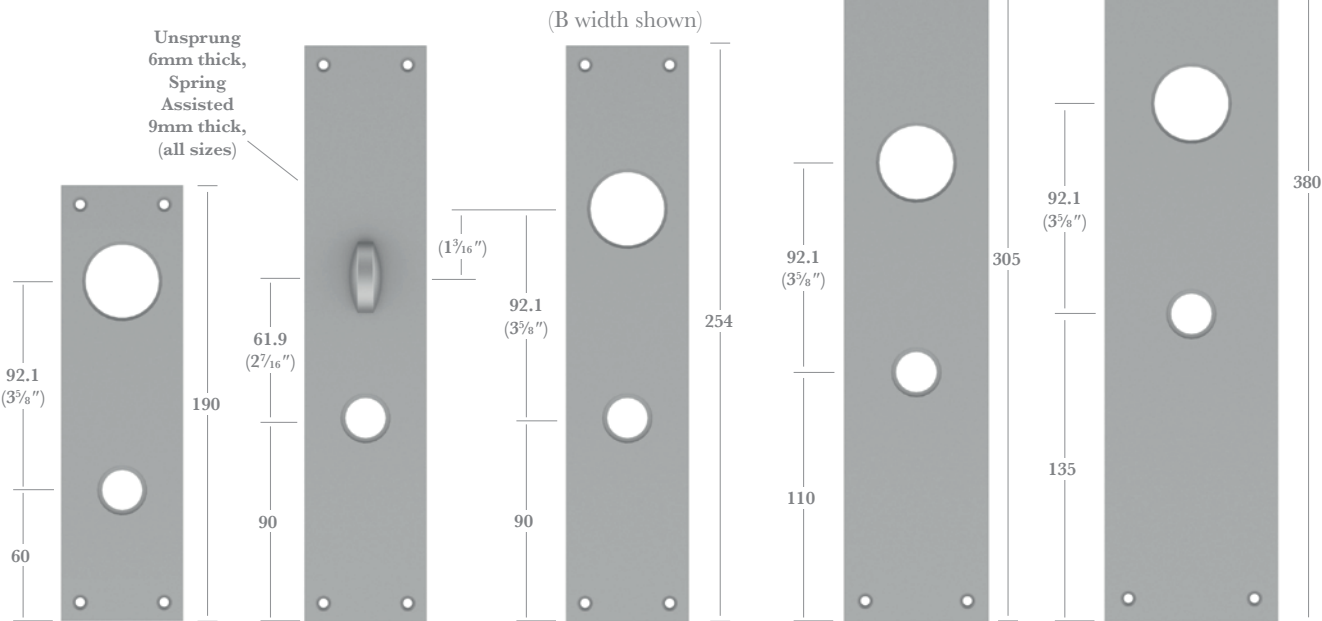


Plate Length	190mm	254mm	305mm	380mm
Code	--6	--7	--8	--9


All Plate Lengths are available in the following widths:

Plate Width	44mm	54mm	64mm	76mm
Code	A*	B	C	D

* Availability dependent on Backplate design - see section ST4 for details


Fixings

Supplied with finish matched no.6 wood screws, alignment collars and installation instructions. An 8mm x 110mm Stainless Steel Lockpoint Spindle and grub screws are supplied when Lever/Knob attached. Spring Assisted Sets supplied with an 8mm x 125mm stainless steel lockpoint spindle with grub screws, to suit doors up to 76mm thick.

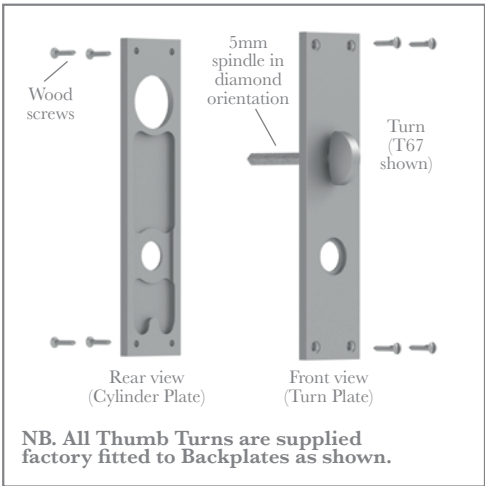

Continues overleaf >

Backplates - Accurate Mortise Locks - Face Fixed

Function	Double Cylinder	Entry	Patio	Storeroom
Code	A01 or AS01	A02 or AS02	A03 or AS03	A04 or AS04
A = 6mm thick (Unsprung) AS = 9mm thick (Spring Assisted)		(*) 		(*) 
Outside Plate	Cylinder	Cylinder	Plain	Cylinder
Inside Plate	Cylinder	Thumb Turn	Thumb Turn	Plain

(*) If functions 02 & 04 are required with operating inside handles & fixed dead dummy outside handles, please order two separate single plates as below. **NB. Ensure you order AS version if a 9mm thick plate is required.**

Function	Passage	Cylinder	Thumb Turn	Passage
Code	A05 or AS05	A06 or AS06	A07 or AS07	A08 or AS08
A = 6mm thick (Unsprung) AS = 9mm thick (Spring Assisted)				
Outside Plate	Plain	Cylinder	—	Plain
Inside Plate	Plain		Thumb Turn	

How to Order Split Finish Sets - order as singles

Plates with Levers/Knobs attached:

- 1) select PLATE DESIGN (e.g. 49 series)
- 2) add LENGTH code (e.g. 497)
- 3) add FUNCTION code (e.g. 497**A02**)
- 4) add WIDTH code (e.g. 497A02**B**)
- 5) add COLLAR DESIGN (e.g. 497A02B/**G**)
- 6) add TURN code if required (e.g. 497A02B/G/**T67**)
- 7) add CYLINDER OPTION code if required (e.g. 497A02B/G/T67/**C01**)
- 8) add FINISH code (e.g. 497A02B/G/T67/C01/**PN**)
- 9) add LEVER/KNOB code (e.g. 497A02B/G/T67/C01/PN/**7774**).

All functions (except A01 & A05) with LEVERS - add HANDING LH or RH (e.g. 497A02B/G/T67/C01/PN/7774**RH**).

NB. Exterior Door Sets are handed from OUTSIDE Plate; Single Plates with Levers attached are handed as per LEVER ORIENTATION - see handing illustrations.

For FIX DEAD pair of plates add FDS to code (e.g. 497A05B/G/PN/7774/**FDS**).

For FIX DEAD single plates add FD to code (e.g. 497A08B/G/PN/7774LH/**FD**).

Plates Only: (not available Spring Assisted)

- 1) select PLATE DESIGN (e.g. 49 series)
- 2) add LENGTH code (e.g. 497)
- 3) add FUNCTION code (e.g. 497**A02**)
- 4) add WIDTH code (e.g. 497A02**B**)
- 5) add COLLAR DESIGN (e.g. 497A02B/**G**)
- 6) add TURN code if required (e.g. 497A02B/G/**T67**)
- 7) add CYLINDER OPTION code if required (e.g. 497A02B/G/T67/**C01**)
- 8) add FINISH code (e.g. 497A02B/G/T67/C01/**PN**).

For FIX DEAD pair of plates add FDS to code (e.g. 497A05B/G/PN/**FDS**).


For FIX DEAD single plates add FD to code (e.g. 497A08B/G/PN/**FD**).

SPRING ASSISTED PLATES (9mm thick). These require a raised collar (G seating is not possible) see page ST5:210 for illustration.

METAL SKINNED DOORS - Add MTS to CODE (e.g.PN/7774RH/**MTS**) and backplates will be supplied with metal thread screws instead of wood screws.



EXTERIOR DOOR SET HANDING



HANDING - Single Lever



LH RH

FIX DEAD DUMMY OPTION



Plates with Lever/ Knob attached - achieved by custom machining both the Plate & Lever/ Knob, then fixing together with a lockbolt.

Plates Only - supplied with a 7813 Fix Dead Dummy Mount.



Backplates - Accurate Mortise Locks - Concealed Fix

87 Series Plates with type L collar, T53 Turn & C01 Cylinder option illustrated

Concealed Fix Plates cannot be supplied with Levers or Knobs attached. Door Levers & Knobs are ordered separately - see sections ST1 & ST2.

OPTIONS:
Plate designs - ST4
Seating/Collars - ST6:010
Thumb Turns - ST6:020 & 030
Cylinder Options - ST6:050



Designed to work in conjunction with Accurate 9000/9100 series full mortise locks

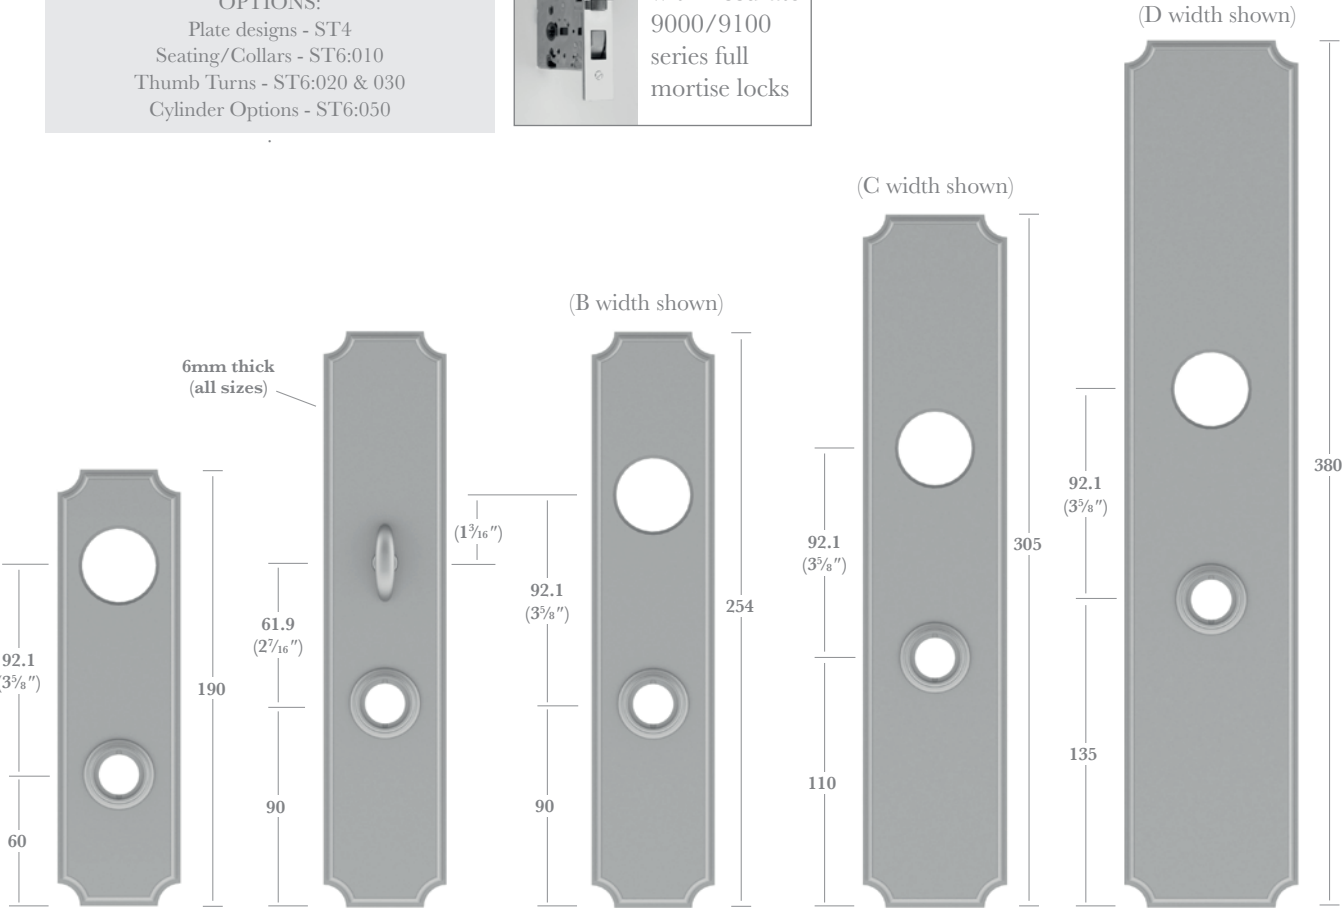


Plate Length	190mm	254mm	305mm	380mm
Code	--1	--2	--3	--4

All Plate Lengths are available in the following widths:

Plate Width	44mm	54mm	64mm	76mm
Code	A*	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with subroses, no.4 x 13mm wood screws, alignment collars and installation instructions.

Fix Dead Plates are supplied with 7813 mounts in place of standard subroses - see page ST6:080 for details.

LEVER HIGH CONFIGURATION




To order for Lever High application add **X** into code after PLATE DESIGN (e.g. 87**X**2...).

Rear view (Cylinder Plate)

Front view (Turn Plate)

NB. All Thumb Turns are supplied factory fitted to Backplates as shown.

Backplates - Accurate Mortise Locks - Concealed Fix

Function	Double Cylinder	Entry	Patio	Storeroom
Code	A01	A02	A03	A04
				
Outside Plate	Cylinder	Cylinder	Plain	Cylinder
Inside Plate	Cylinder	Thumb Turn	Thumb Turn	Plain

Function	Passage	Cylinder	Thumb Turn	Passage
Code	A05	A06	A07	A08
				
Outside Plate	Plain	Cylinder	—	Plain
Inside Plate	Plain		Thumb Turn	

How to Order

Split Finish Sets -
order as singles

- 1) select PLATE DESIGN (e.g. **87** series)
- 2) add LENGTH code (e.g. **872**)
- 3) add FUNCTION code (e.g. 872**A02**)
- 4) add WIDTH code (e.g. 872A02**B**)
- 5) add COLLAR DESIGN (e.g. 872A02B/**L**)
- 6) add TURN code if required (e.g. 872A02B/L/**T53**)
- 7) add CYLINDER OPTION code if required (e.g. 872A02B/L/T53/**C01**)
- 8) add FINISH code (e.g. 872A02B/L/T53/C01/**PN**).

For FIX DEAD pairs of plates add FDS (e.g. 872A05B/L/PN/**FDS**).

For FIX DEAD single plate add FD (e.g. 872A08B/L/PN/**FD**).



METAL SKINNED DOORS - Add MTS to CODE (e.g.C01/PN/**MTS**) and subroses will be supplied with metal thread screws instead of wood screws.



Backplates - Accurate Mortise Locks - Blind Bolt Fixed

67 Series Plates with type G seating, T73 Turn & C01 Cylinder option illustrated



Blind Bolt Fixed Exterior Door Set Plates can be supplied with Allart Select Levers or Knobs attached (circlip fixed).



Designed to work in conjunction with Accurate 9000/9100 series full mortise locks

OPTIONS:
Plate designs - ST4
Seating/Collars - ST6:010
Thumb Turns - ST6:020 & 030
Cylinder Options - ST6:050
Lever/Knob designs - ST1 & ST2

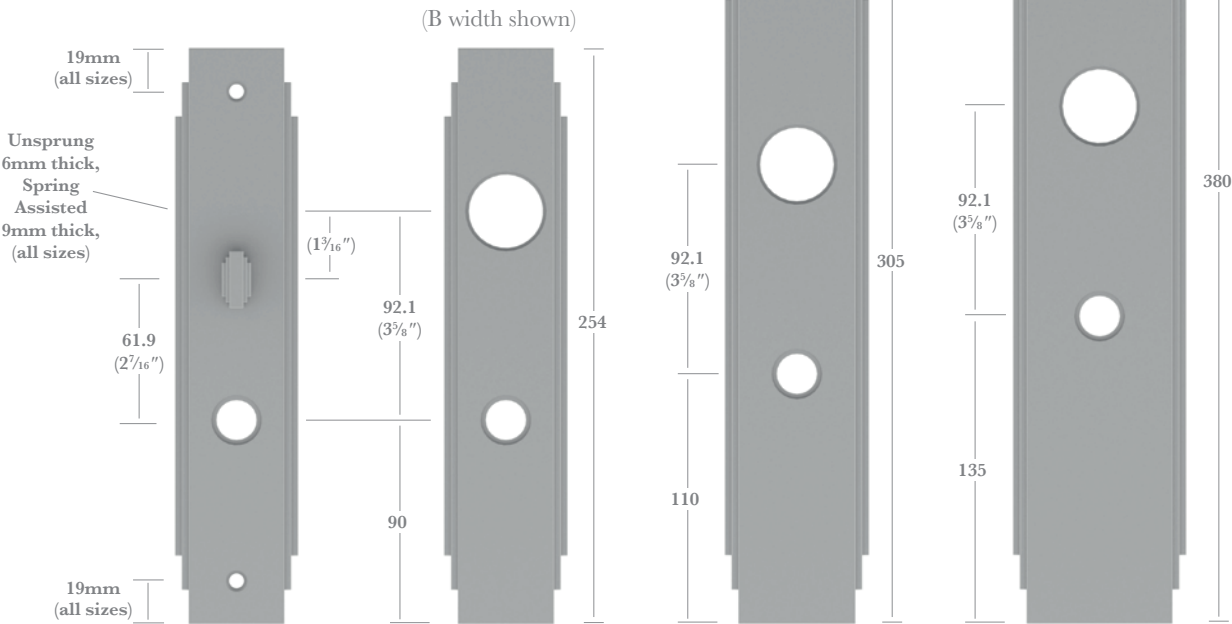


Plate Length	254mm	305mm	380mm
Code	--7	--8	--9


All Plate Lengths are available in the following widths:

Plate Width	44mm	54mm	64mm	76mm
Code	A*	B	C	D

* Availability dependent on Backplate design - see section ST4 for details

Fixings

Supplied with M5 x 25mm finish matched slotted blind nuts and M5 allthreads, alignment collars and installation instructions.
An 8mm x 110mm stainless steel Lockpoint Spindle and grub screws are supplied when Lever/Knob attached, to suit doors up to 64mm thick (longer spindles available - see ST6:080). Spring Assisted Sets supplied with an 8mm x 125mm stainless steel lockpoint spindle with grub screws, to suit doors up to 76mm thick.

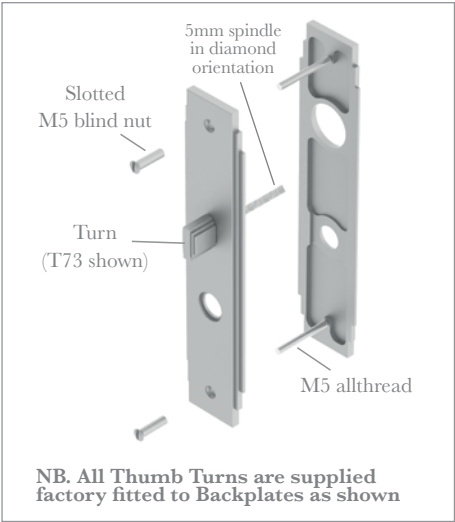

Continues overleaf >

Backplates - Accurate Mortise Locks - Blind Bolt Fixed

Function	Double Cylinder	Entry	Patio	Storeroom	Passage
Code	A11 or AS11	A12 or AS12	A13 or AS13	A14 or AS14	A15 or AS15
A = 6mm thick (Unsprung)		(*)	(*)	(*)	(*)
AS = 9mm thick (Spring Assisted)					
Outside Plate	Cylinder	Cylinder	Plain	Cylinder	Plain
Inside Plate	Cylinder	Thumb Turn	Thumb Turn	Plain	Plain

(*) If functions are required with operating inside handles & fixed dead dummy outside handles, please order two separate single plates as below. **NB. Ensure you order AS version if a 9mm thick plate is required.**

Function	Cylinder	Cylinder	Thumb Turn	Passage	Passage
Code	A16 or AS16	A17 or AS17	A18 or AS18	A19 or AS19	A20 or AS20
A = 6mm thick (Unsprung)					
AS = 9mm thick (Spring Assisted)					
Outside Plate	Cylinder	—	—	Plain	—
Inside Plate	—	Cylinder	Thumb Turn	—	Plain

How to Order

Split Finish Sets - order as singles

Plates with Levers/Knobs attached:

- 1) select PLATE DESIGN (e.g. 67 series)
- 2) add LENGTH code (e.g. 677)
- 3) add FUNCTION code (e.g. 677A12)
- 4) add WIDTH code (e.g. 677A12B)
- 5) add COLLAR DESIGN (e.g. 677A12B/G)
- 6) add TURN code if required (e.g. 677A12B/G/T73)
- 7) add CYLINDER OPTION code if required (e.g. 677A12B/G/T73/C01)
- 8) add FINISH code (e.g. 677A12B/G/T73/C01/PN)
- 9) add LEVER/KNOB code (e.g. 677A12B/G/T73/C01/PN/7734).

All FUNCTIONS with LEVERS - add HANDING LH or RH (e.g. 677A12B/G/T73/C01/PN/7734RH).

NB. Exterior Door Sets are handed from OUTSIDE Plate; Single Plates with Levers attached are handed as per LEVER ORIENTATION - see handing illustrations.

For FIX DEAD pair of plates add FDS to code (e.g. 677A15B/G/PN/7734RH/FDS).

For FIX DEAD single plates add FD to code (e.g. 677A19B/G/PN/7734LH/FD).


Plates Only: (not available Spring Assisted)

- 1) select PLATE DESIGN (e.g. 67 series)
 - 2) add LENGTH code (e.g. 677)
 - 3) add FUNCTION code (e.g. 677A12)
 - 4) add WIDTH code (e.g. 677A12B)
 - 5) add COLLAR DESIGN (e.g. 677A12B/G)
 - 6) add TURN code if required (e.g. 677A12B/G/T73)
 - 7) add CYLINDER OPTION code if required (e.g. 677A12B/G/T73/C01)
 - 8) add FINISH code (e.g. 677A12B/G/T73/C01/PN).
- For FIX DEAD pair of plates add FDS to code (e.g. 677A15B/G/PN/FDS).
- For FIX DEAD single plates add FD to code (e.g. 677A19B/G/PN/FD).


SPRING ASSISTED PLATES (9mm thick). These require a raised collar (G seating is not possible) see page ST5:210 for illustration.

METAL SKINNED DOORS - Blind Bolt Fixing is suitable for use with metal skinned doors - no adaption necessary.

EXTERIOR DOOR SET HANDING



HANDING - Single Lever



FIX DEAD DUMMY OPTION





Plates with Lever/ Knob attached - achieved by custom machining both the Plate & Lever/Knob, then fixing together with a lockbolt.

Plates Only - supplied with a 7813 Fix Dead Dummy Mount.



Multipoint Sets - Euro Profile Locks (Bolt above & below lockcase)

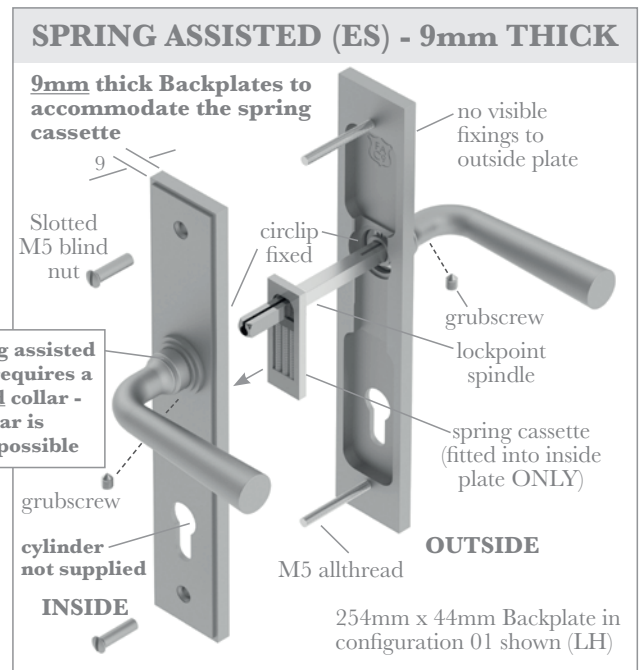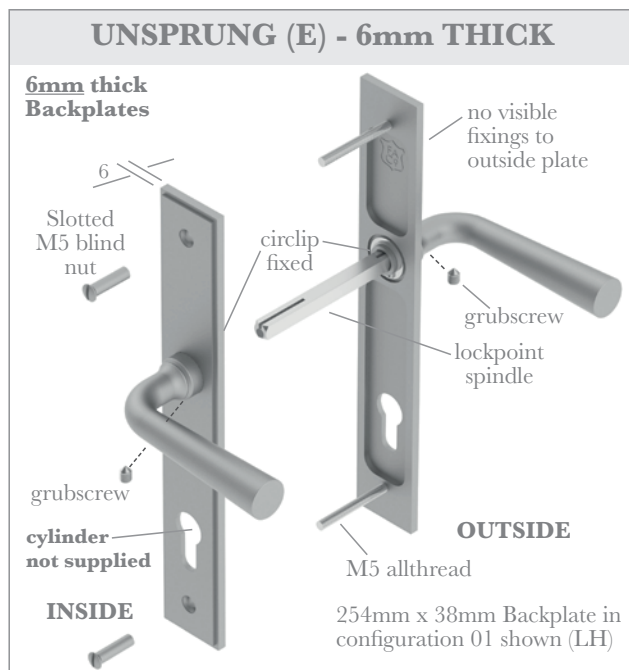

OPTIONS:
 Plate designs - ST4
 Seating/Collars - ST6:010
 Lever designs - ST1

6mm thick - Code E
 9mm thick - Code ES

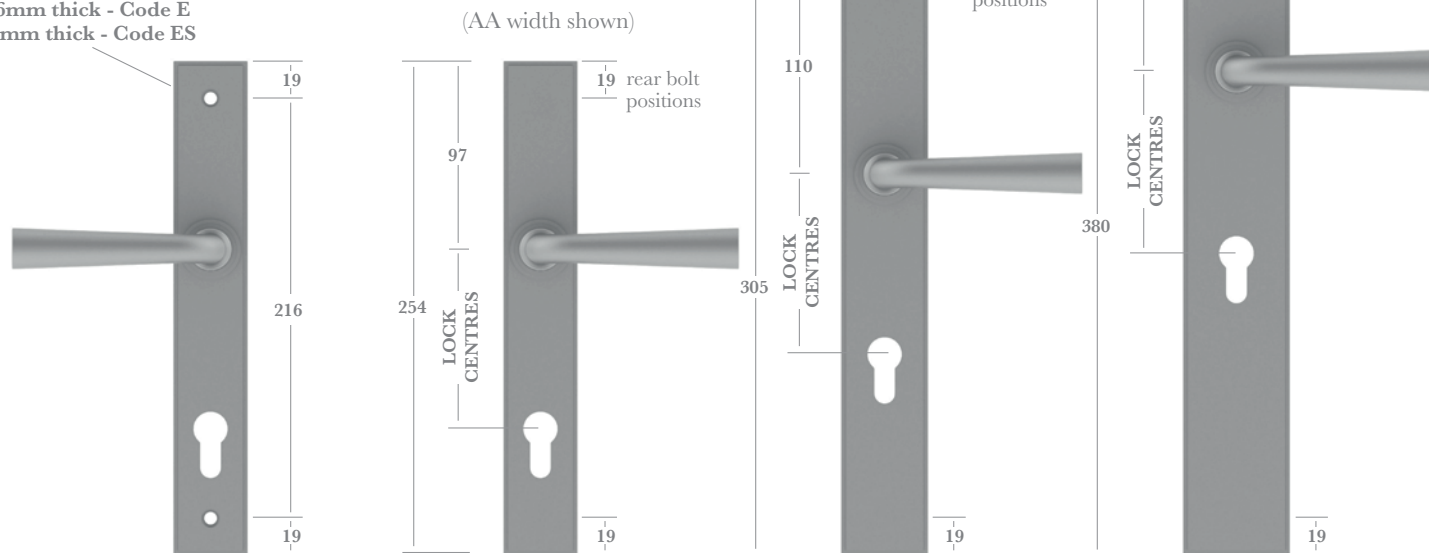


Plate Length	254mm	305mm	380mm
Code	--7	--8	--9

Plate Width	27mm	32mm	38mm	44mm	54mm	64mm
Code	AC*	AB*	AA*	A	B	C

*Availability dependent on Backplate design - see section ST4 for details.

Continues overleaf >

Multipoint Sets - Euro Profile Locks (Bolt above & below lockcase)

Function Code	E01 or ES01	E02 or ES02	E03 or ES03	E04 or ES04	E05 or ES05
E = 6mm thick (Unsprung)					
ES = 9mm thick (Spring Assisted)	LH set shown	LH set shown	LH set shown	LH set shown	LH set shown
Outside Plate	Lever & Euro Cutout	Lever only (*)	Blank	Lever only (*)	Blank
Inside Plate	Lever & Euro Cutout	Lever & Euro Cutout	Lever & Euro Cutout	Lever only	Lever only

(*) If functions 02 & 04 are required with operating inside handles & fixed dead dummy outside handles, please order two separate single plates as below. **NB. Ensure you order ES version if a 9mm thick plate is required.**

Function Code	E06 or ES06	E07 or ES07	E08 or ES08	E09 or ES09	E10 or ES10	E11 or ES11	E12 or ES12	E13 or ES13
E = 6mm thick (Unsprung)								
ES = 9mm thick (Spring Assisted)	RH shown	RH shown	LH shown	LH shown	Blank	Euro Cutout	Blank	Euro Cutout
Outside Plate	—	—	Lever & Euro Cutout	Lever only	Blank	Euro Cutout	—	—
Inside Plate	Lever & Euro Cutout	Lever only	—	—	—	—	Blank	Euro Cutout

Fixings

Supplied with M5 x 25mm finish matched slotted blind nuts and M5 allthreads. Unsprung Sets supplied with an 8mm x 110mm stainless steel lockpoint spindle with grubscrews, to suit doors up to 64mm thick. Spring Assisted Sets supplied with an 8mm x 125mm stainless steel lockpoint spindle with grubscrews, to suit doors up to 76mm thick.

How to Order

Split Finish Sets - order as singles

Functions E (6mm thick, Unsprung):

- 1) select PLATE DESIGN (e.g. 59 series)
- 2) add LENGTH code (e.g. 597)
- 3) add FUNCTION code (e.g. 597E01)
- 4) add WIDTH code (e.g. 597E01AA)
- 5) add LOCK CENTRES - if applicable (e.g. 597E01AA92)
- 6) add COLLAR DESIGN (e.g. 597E01AA92K)
- 7) add FINISH (e.g. 597E01AA92K/PN)
- 8) add LEVER code (e.g. 597E01AA92K/PN/7706)
- 9) add HANDING LH or RH (e.g. 597E01AA92K/PN/7706RH).

For FIX DEAD pair of plates add FDS to code (e.g. 597E04AA/K/PN/7706RH/FDS).

For FIX DEAD single plates add FD to code (e.g. 597E09AA/K/PN/7706LH/FD).

Functions ES (9mm thick, Spring Assisted):

- 1) select PLATE DESIGN (e.g. 59 series)
- 2) add LENGTH code (e.g. 597)
- 3) add FUNCTION code (e.g. 597ES01)
- 4) add WIDTH code (e.g. 597ES01AA)
- 5) add LOCK CENTRES - if applicable (e.g. 597ES01AA92)
- 6) add COLLAR DESIGN (e.g. 597ES01AA92K)
- 7) add FINISH (e.g. 597ES01AA92K/PN)
- 8) add LEVER code (e.g. 597ES01AA92K/PN/7706)
- 9) add HANDING LH or RH (e.g. 597ES01AA92K/PN/7706RH).

For FIX DEAD pair of plates add FDS to code (e.g. 597ES04AA/K/PN/7706RH/FDS).

For FIX DEAD single plates add FD to code (e.g. 597ES09AA/K/PN/7706LH/FD).

HANDING - Multipoint Lock Sets are handed from the OUTSIDE plate, see Multipoint Set Handing box above. Single Plates with Levers attached are handed as per LEVER ORIENTATION - see Function Code illustrations above.

Due to the operation of multipoint locks, we recommend the specification of Levers attached whenever possible. Should you require plates only - please contact us for ordering details.

MULTIPOINT SET HANDING

outside inside

LH SET



inside outside

RH SET

FIX DEAD DUMMY OPTION (Supplied assembled)

Achieved by custom machining both the Plate & Lever/Knob, then fixing together with a lockbolt.

Multipoint Sets - Euro Profile Locks (Bolt through lockcase & below)

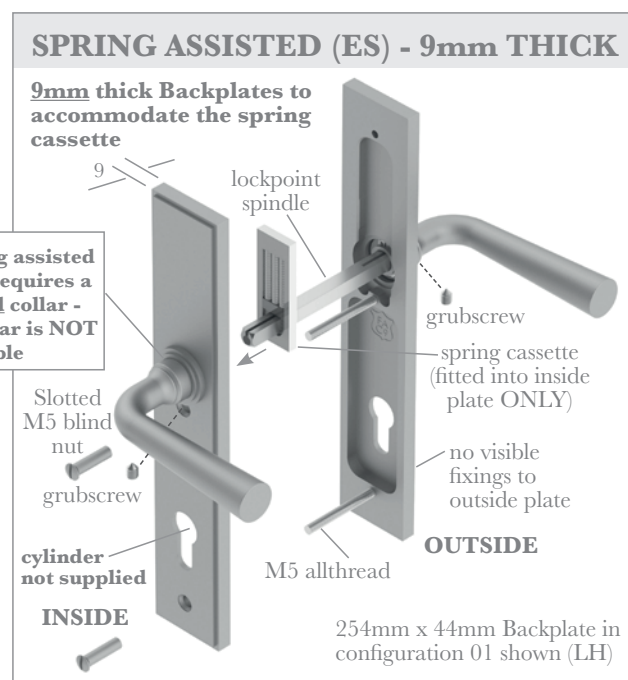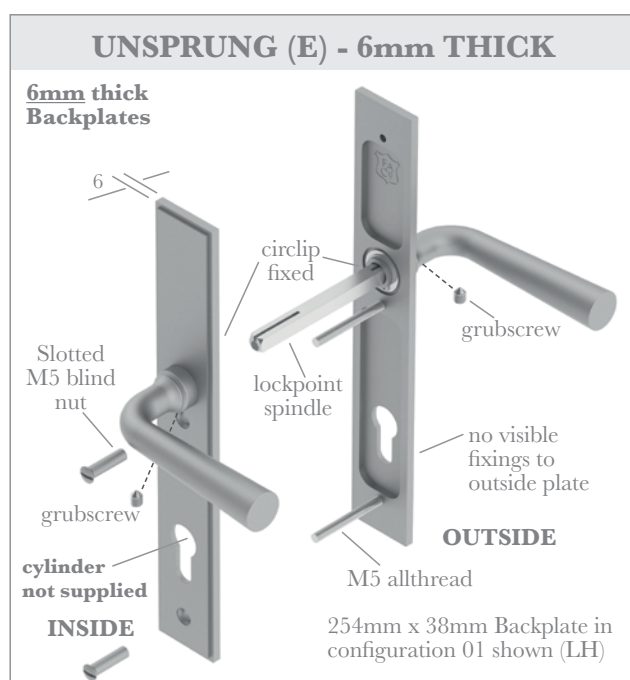

OPTIONS:

Plate designs - ST4
Seating/Collars - ST6:010
Lever designs - ST1

6mm thick - Code E
9mm thick - Code ES

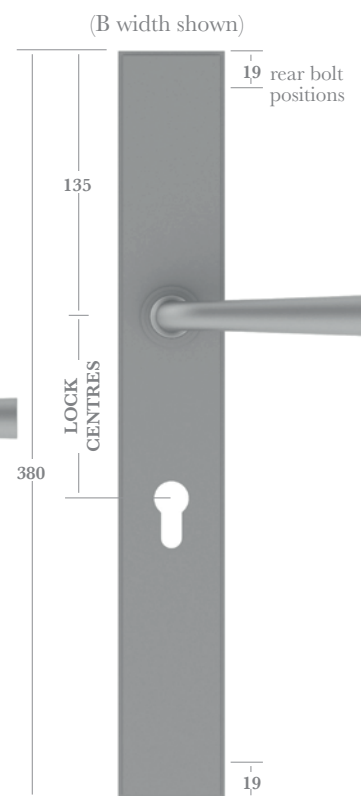
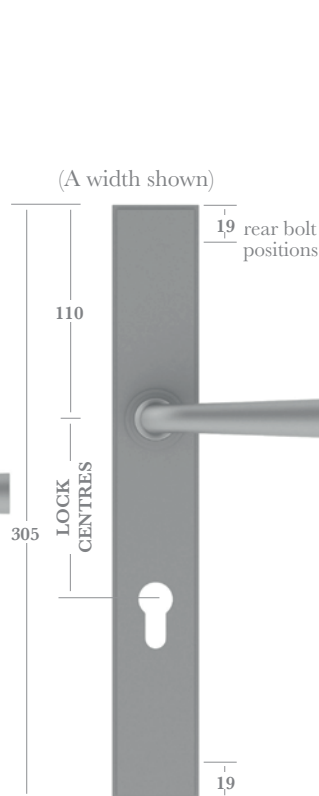
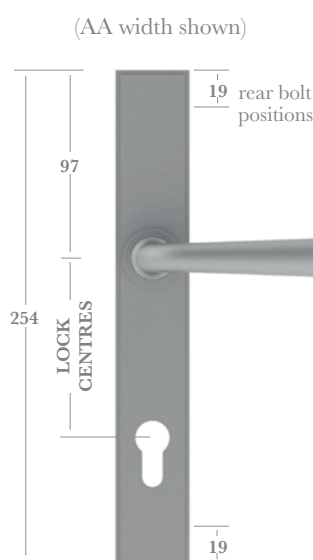
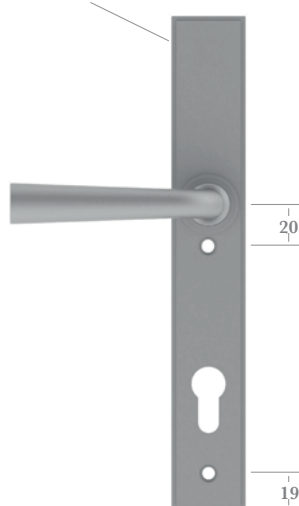


Plate Length	254mm	305mm	380mm
Code	--7	--8	--9

Plate Width	27mm	32mm	38mm	44mm	54mm	64mm
Code	AC*	AB*	AA*	A	B	C

*Availability dependent on Backplate design - see section ST4 for details.

Continues overleaf >

UPDATED
02/22

ST5:165

Multipoint Sets - Euro Profile Locks (Bolt through lockcase & below)

Function Code	E21 or ES21	E22 or ES22	E23 or ES23	E24 or ES24	E25 or ES25
E = 6mm thick (Unsprung)					
ES = 9mm thick (Spring Assisted)	LH set shown	LH set shown	LH set shown	LH set shown	LH set shown
Outside Plate	Lever & Euro Cutout	Lever only (*)	Blank	Lever only (*)	Blank
Inside Plate	Lever & Euro Cutout	Lever & Euro Cutout	Lever & Euro Cutout	Lever only	Lever only

(*) If functions 22 & 24 are required with operating inside handles & fixed dead dummy outside handles, please order two separate single plates as below. **NB. Ensure you order ES version if a 9mm thick plate is required.**

Function Code	E26 or ES26	E27 or ES27	E28 or ES28	E29 or ES29	E30 or ES30	E31 or ES31	E32 or ES32	E33 or ES33
E = 6mm thick (Unsprung)								
ES = 9mm thick (Spring Assisted)	RH shown	RH shown	LH shown	LH shown				
Outside Plate	—	—	Lever & Euro Cutout	Lever only	Blank	Euro Cutout	—	—
Inside Plate	Lever & Euro Cutout	Lever only	—	—	—	—	Blank	Euro Cutout

Fixings

Supplied with M5 x 25mm finish matched slotted blind nuts and M5 allthreads. Unsprung Sets supplied with an 8mm x 110mm stainless steel lockpoint spindle with grubscrews, to suit doors up to 64mm thick. Spring Assisted Sets supplied with an 8mm x 125mm stainless steel lockpoint spindle with grubscrews, to suit doors up to 76mm thick.

How to Order

Split Finish Sets - order as singles

Functions E (6mm thick, Unsprung):

- 1) select PLATE DESIGN (e.g. **59** series)
- 2) add LENGTH code (e.g. **597**)
- 3) add FUNCTION code (e.g. 597**E21**)
- 4) add WIDTH code (e.g. 597E21**AA**)
- 5) add LOCK CENTRES - if applicable (e.g. 597E21AA**92**)
- 6) add COLLAR DESIGN (e.g. 597E21AA92**K**)
- 7) add FINISH (e.g. 597E21AA92K/**PN**)
- 8) add LEVER code (e.g. 597E21AA92K/PN/**7706**)
- 9) add HANDING LH or RH (e.g. 597E21AA92K/PN/7706**RH**).

For FIX DEAD pair of plates add FDS to code (e.g. 597E24AA/K/PN/7706RH/**FDS**).

For FIX DEAD single plates add FD to code (e.g. 597E29AA/K/PN/7706LH/**FD**).

HANDING - Multipoint Lock Sets are handed from the OUTSIDE plate, see Multipoint Set Handing box above. Single Plates with Levers attached are handed as per LEVER ORIENTATION - see Function Code illustrations above.

Functions ES (9mm thick, Spring Assisted):

- 1) select PLATE DESIGN (e.g. **59** series)
- 2) add LENGTH code (e.g. **597**)
- 3) add FUNCTION code (e.g. 597**ES21**)
- 4) add WIDTH code (e.g. 597ES21**AA**)
- 5) add LOCK CENTRES - if applicable (e.g. 597ES21AA**92**)
- 6) add COLLAR DESIGN (e.g. 597ES21AA92**K**)
- 7) add FINISH (e.g. 597ES21AA92K/**PN**)
- 8) add LEVER code (e.g. 597ES21AA92K/PN/**7706**)
- 9) add HANDING LH or RH (e.g. 597ES21AA92K/PN/7706**RH**).

For FIX DEAD pair of plates add FDS to code (e.g. 597ES24AA/K/PN/7706RH/**FDS**).

For FIX DEAD single plates add FD to code (e.g. 597ES29AA/K/PN/7706LH/**FD**).

MULTIPOINT SET HANDING

outside inside

LH SET

inside outside

RH SET

FIX DEAD DUMMY OPTION (Supplied assembled)

Achieved by custom machining both the Plate & Lever/Knob, then fixing together with a lockbolt.

Due to the operation of multipoint locks, we recommend the specification of Levers attached whenever possible. Should you require plates only - please contact us for ordering details.

Multipoint Sets - Pella & GU Locks

UNSPRUNG (P or G) - 6mm THICK

6mm thick Backplates

M5 allthread

Slotted M5 blind nut

GU

no visible fixings to outside plate

circlip fixed

grubscrew

lockpoint spindle

Turn machined to accept vertical tailpiece (tailpiece supplied for functions 02, 03 & 06)

grubscrew

lock block supplied with cylinder

INSIDE

Thumb Turn tailpiece fitted horizontal (GU) or vertical (Pella)

Pella

OUTSIDE

254mm x 38mm Backplate in configuration 01 shown (RH)

SPRING ASSISTED (PS or GS) - 9mm THICK

9mm thick Backplates to accommodate the spring cassette

M5 allthread

Slotted M5 blind nut

GU

no visible fixings to outside plate

circlip fixed

grubscrew

lockpoint spindle

spring cassette (fitted into inside plate ONLY)

grubscrew

lock block supplied with cylinder

INSIDE

Thumb Turn tailpiece fitted horizontal (GU) or vertical (Pella)

Pella

OUTSIDE

254mm x 44mm Backplate in configuration 01 shown (RH)

Spring assisted type requires a raised collar - G collar is NOT possible

OPTIONS:

Plate designs - ST4

Seating/Collars - ST6:010

Thumb Turns - ST6:020 & 030

Lever designs - ST1

6mm thick - Code P or G
9mm thick - Code PS or GS

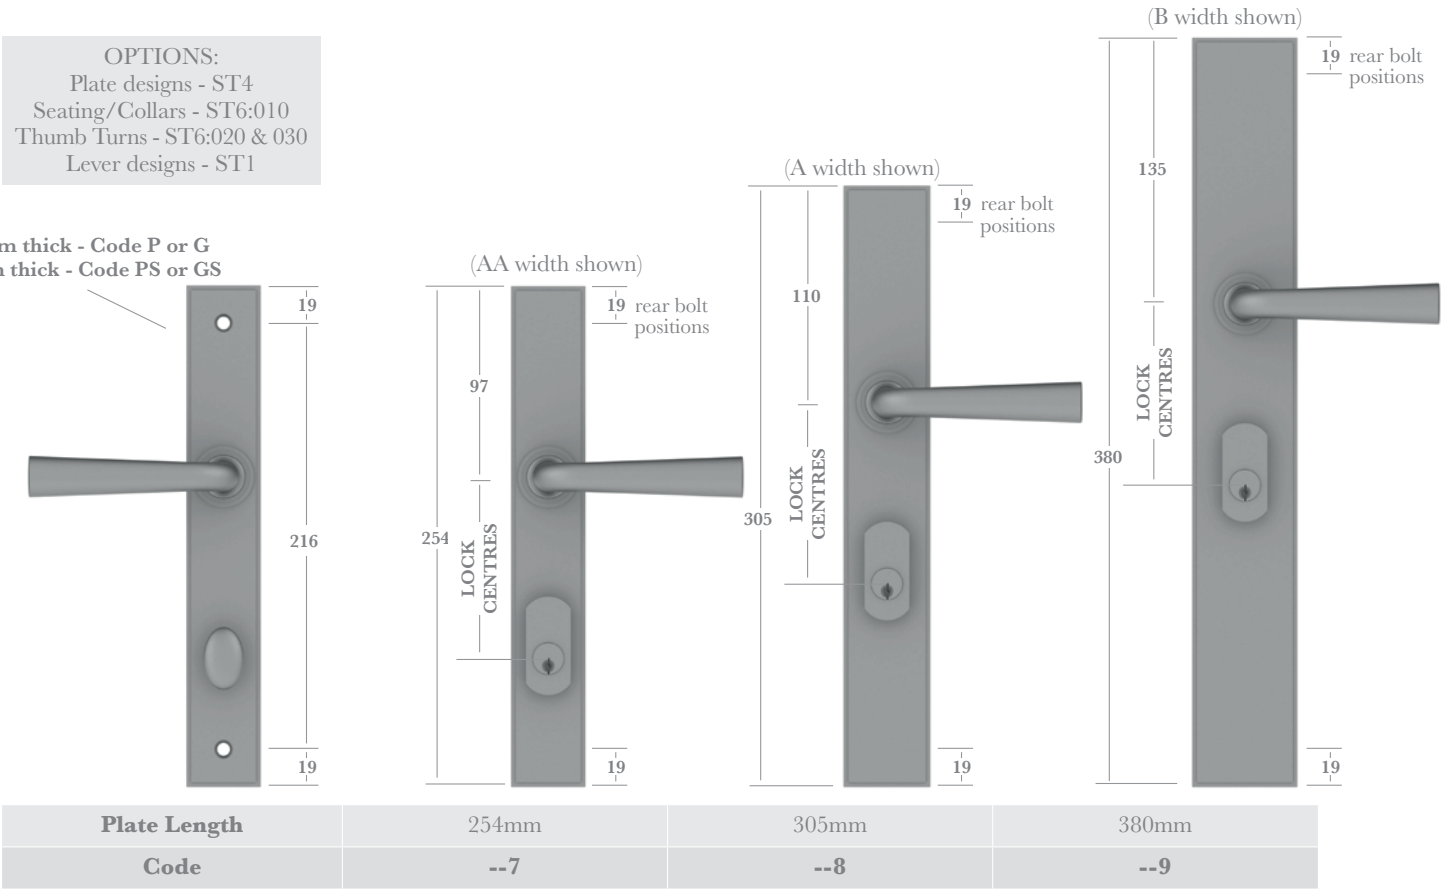




Plate Width	27mm	32mm	38mm	44mm	54mm	64mm
Code	AC*	AB*	AA*	A	B	C

*Availability dependent on Backplate design - see section ST4 for details.

Continues overleaf >

Multipoint Sets - Pella & GU Locks (continued)

Pella	P01 or PS01	P02 or PS02	P03 or PS03	P04 or PS04	P05 or PS05
GU	G01 or GS01	G02 or GS02	G03 or GS03	G04 or GS04	G05 or GS05
Function Codes P / G = 6mm thick (Unsprung) PS / GS = 9mm thick (Spring Assisted)					
	LH set shown	LH set shown	LH set shown	LH set shown	LH set shown
Outside Plate	Lever & Lock Block	Lever only (*)	Blank	Lever only (*)	Blank
Inside Plate	Lever & Thumb Turn	Lever & Thumb Turn	Lever & Thumb Turn	Lever only	Lever only

(*) If functions 02 & 04 are required with operating inside handles & fixed dead dummy outside handles, please order two separate single plates as below. **NB. Ensure you order PS or GS version if a 9mm thick plate is required.**

Pella	P06, PS06, P12†, PS12†	P07 or PS07	P08 or PS08	P09 or PS09	P10 or PS10	P11 or PS11
GU	G06, GS06, G12†, GS12†	G07 or GS07	G08 or GS08	G09 or GS09	G10 or GS10	G11 or GS11
Function Codes P / G = 6mm thick (Unsprung) PS / GS = 9mm thick (Spring Assisted)						
	RH shown	RH shown	LH shown	LH shown		
Outside Plate	—	—	Lever & Lock Block	Lever only	Blank	Lock Block
Inside Plate	Lever & Thumb Turn	Lever only	—	—	—	—

† WITHOUT TAILPIECE

Fixings

Supplied with M5 x 25mm finish matched slotted blind nuts and M5 allthreads. Unsprung Sets supplied with an 8mm x 110mm stainless steel lockpoint spindle with grubscrews, to suit doors up to 64mm thick. Spring assisted sets supplied with an 8mm x 125mm stainless steel lockpoint spindle with grubscrews, to suit doors up to 76mm thick. Functions ##01 and ##08 will be supplied with a cylinder.

How to Order

Split Finish Sets - order as singles

Functions P or G (6mm thick, Unsprung):

- 1) select PLATE DESIGN (e.g. **59** series)
- 2) add LENGTH code (e.g. **597**)
- 3) add FUNCTION code (e.g. 597**P01**)
- 4) add WIDTH code (e.g. 597P01**AA**)
- 5) add LOCK CENTRES - if applicable (e.g. 597P01AA**92**)
- 6) add COLLAR DESIGN (e.g. 597P01AA92**K**)
- 7) add TURN code if required (e.g. 597P01AA92K/**T61**)
- 8) add FINISH (e.g. 597P01AA92K/T61/**PN**)
- 9) add LEVER code (e.g. 597P01AA92K/T61/PN/**7706**)
- 10) add HANDING LH or RH (e.g. 597P01AA92K/T61/PN/7706**RH**).

For FIX DEAD pair of plates add FDS to code (e.g. 597P04AA/K/PN/7706RH/**FDS**).

For FIX DEAD single plates add FD to code (e.g. 597P09AA/K/PN/7706LH/**FD**).

Functions PS or GS (9mm thick, Spring Assisted):


- 1) select PLATE DESIGN (e.g. **59** series)
- 2) add LENGTH code (e.g. **597**)
- 3) add FUNCTION code (e.g. 597**PS01**)
- 4) add WIDTH code (e.g. 597PS01**AA**)
- 5) add LOCK CENTRES - if applicable (e.g. 597PS01AA**92**)
- 6) add COLLAR DESIGN (e.g. 597PS01AA92**K**)
- 7) add TURN code if required (e.g. 597PS01AA92K/**T61**)
- 8) add FINISH (e.g. 597PS01AA92K/T61/**PN**)
- 9) add LEVER code (e.g. 597PS01AA92K/T61/PN/**7706**)
- 10) add HANDING LH or RH (e.g. 597PS01AA92K/T61/PN/7706**RH**).

For FIX DEAD pair of plates add FDS to code (e.g. 597PS04AA/K/PN/7706RH/**FDS**).



For FIX DEAD single plates add FD to code (e.g. 597PS09AA/K/PN/7706LH/**FD**).

HANDING - Multipoint Lock Sets are handed from the OUTSIDE plate, see Multipoint Set Handing box above. Single Plates with Levers attached are handed as per LEVER ORIENTATION - see Function Code illustrations above.

Due to the operation of multipoint locks, we recommend the specification of Levers attached whenever possible. Should you require plates only - please contact us for ordering details.

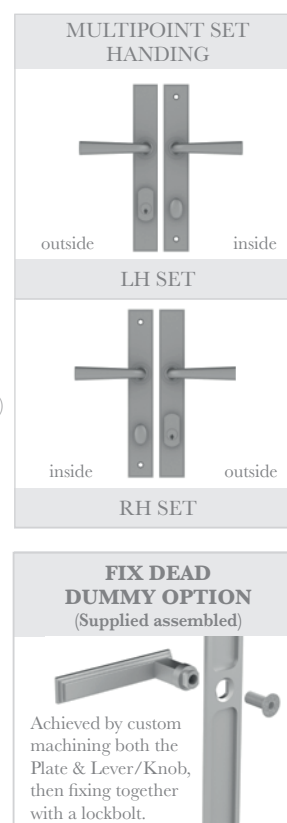

Multipoint Sets - Marvin Lock (not suitable for Marvin Integrity series)

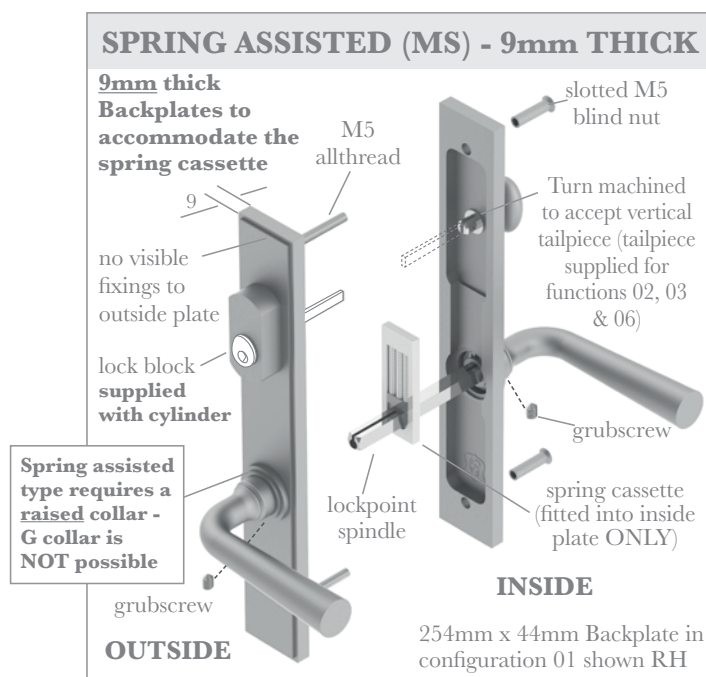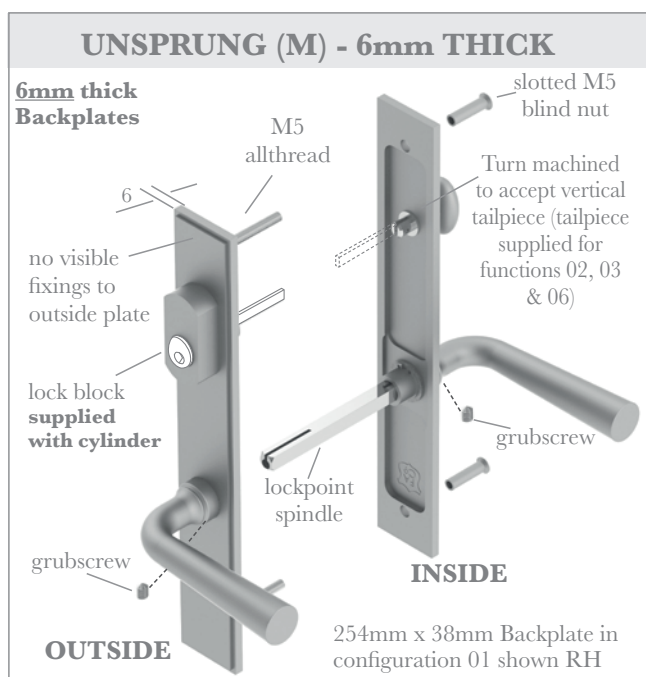

OPTIONS:
 Plate designs - ST4
 Seating/Collars - ST6:010
 Thumb Turns - ST6:020 & 030
 Lever designs - ST1

6mm thick - Code M
 9mm thick - Code MS

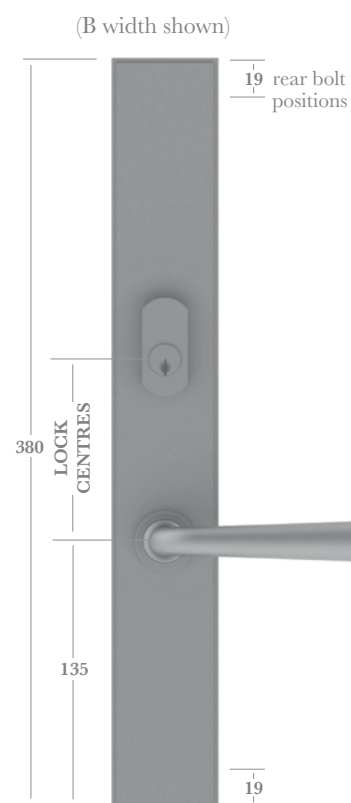
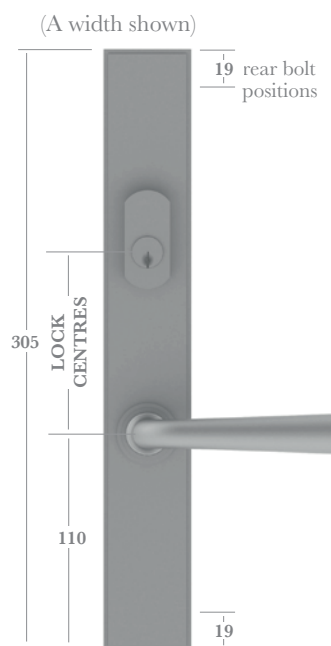
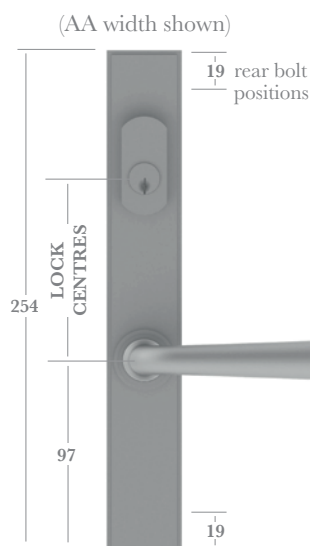
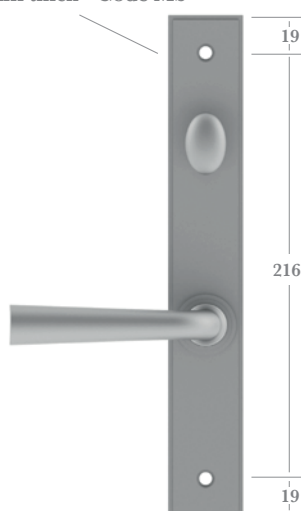


Plate Length	254mm	305mm	380mm
Code	--7	--8	--9

Plate Width	27mm	32mm	38mm	44mm	54mm	64mm
Code	AC*	AB*	AA*	A	B	C

*Availability dependent on Backplate design - see section ST4 for details.

Continues overleaf >

UPDATED
01/17

ST5:190

Multipoint Sets - Marvin Lock (continued)

Function Code	M01 or MS01	M02 or MS02	M03 or MS03	M04 or MS04	M05 or MS05
M = 6mm thick (Unsprung)					
MS = 9mm thick (Spring Assisted)					
Outside Plate	Lever & Lock Block	Lever only (*)	Blank	Lever only (*)	Blank
Inside Plate	Lever & Thumb Turn	Lever & Thumb Turn	Lever & Thumb Turn	Lever only	Lever only

(*) If functions 02 & 04 are required with operating inside handles & fixed dead dummy outside handles, please order two separate single plates as below. **NB. Ensure you order MS version if a 9mm thick plate is required.**

Function Code	M06 or MS06	M07 or MS07	M08 or MS08	M09 or MS09	M10 or MS10	M11 or MS11
M = 6mm thick (Unsprung)						
MS = 9mm thick (Spring Assisted)						
Outside Plate	—	—	Lever & Lock Block	Lever only	Blank	Lock Block
Inside Plate	Lever & Thumb Turn	Lever only	—	—	—	—

Fixings [†]WITHOUT TAILPIECE

Supplied with M5 x 25mm finish matched slotted blind nuts and M5 allthreads. Unsprung Sets supplied with an 8mm x 110mm stainless steel lockpoint spindle with grub screws, to suit doors up to 64mm thick. Spring assisted sets supplied with an 8mm x 125mm stainless steel lockpoint spindle with grub screws, to suit doors up to 76mm thick. Functions ##01 and ##08 will be supplied with a cylinder.

How to Order Split Finish Sets - order as singles

Functions M (6mm thick, Unsprung):

- 1) select PLATE DESIGN (e.g. 59 series)
- 2) add LENGTH code (e.g. 597)
- 3) add FUNCTION code (e.g. 597M01)
- 4) add WIDTH code (e.g. 597M01AA)
- 5) add LOCK CENTRES - if applicable (e.g. 597M01AA92)
- 6) add COLLAR DESIGN (e.g. 597M01AA92K)
- 7) add TURN code if required (e.g. 597M01AA92K/T61)
- 8) add FINISH (e.g. 597M01AA92K/T61/PN)
- 9) add LEVER code (e.g. 597M01AA92K/T61/PN/7706)
- 10) add HANDING LH or RH (e.g. 597M01AA92K/T61/PN/7706RH).

For FIX DEAD pair of plates add FDS to code (e.g. 597M04AA/K/PN/7706RH/FDS).


For FIX DEAD single plates add FD to code (e.g. 597M09AA/K/PN/7706LH/FD).

Functions MS (9mm thick, Spring Assisted):

- 1) select PLATE DESIGN (e.g. 59 series)
- 2) add LENGTH code (e.g. 597)
- 3) add FUNCTION code (e.g. 597MS01)
- 4) add WIDTH code (e.g. 597MS01AA)
- 5) add LOCK CENTRES - if applicable (e.g. 597MS01AA92)
- 6) add COLLAR DESIGN (e.g. 597MS01AA92K)
- 7) add TURN code if required (e.g. 597MS01AA92K/T61)
- 8) add FINISH (e.g. 597MS01AA92K/T61/PN)
- 9) add LEVER code (e.g. 597MS01AA92K/T61/PN/7706)
- 10) add HANDING LH or RH (e.g. 597MS01AA92K/T61/PN/7706RH).

For FIX DEAD pair of plates add FDS to code (e.g. 597MS04AA/K/PN/7706RH/FDS).


For FIX DEAD single plates add FD to code (e.g. 597MS09AA/K/PN/7706LH/FD).

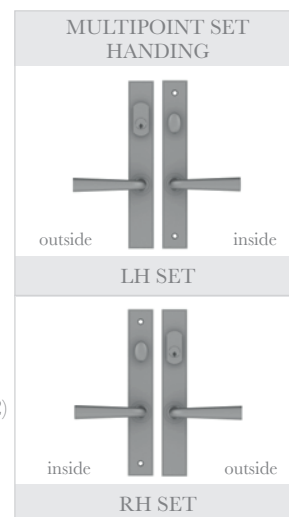

Due to the operation of multipoint locks, we recommend the specification of Levers attached whenever possible. Should you require plates only - please contact us for ordering details.

Spring Assisted Backplates

- Available on Face Fix and Bolt Fix Backplates only, and only where the Levers or Knobs are fitted to the Backplates (circlip fixed).
- Not available on Concealed Fix Backplates.
- Thickness of the Backplate is 9mm in all cases to accommodate the Spring Cassette, which is fitted into the inside plate only.
- Spring Assisted Backplates require a raised collar - G type flush collar is NOT possible.

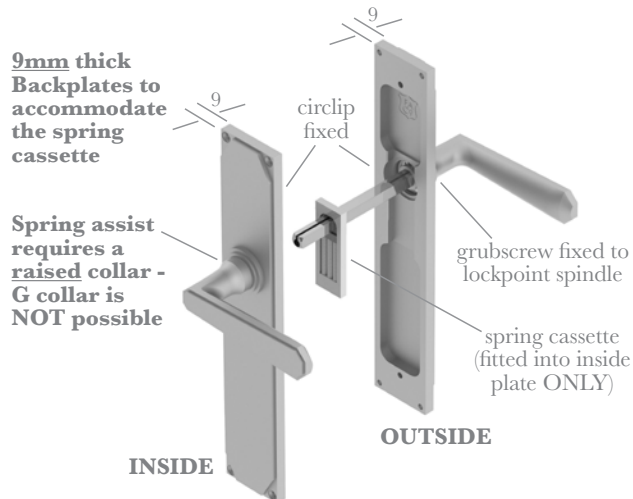

▲ **Latch (Passage)** - see page ST5:010



▲ **Keyhole** - see page ST5:030



▲ **Profile Cylinders** - see page ST5:050



▲ **Privacy** - see page ST5:070



▲ **Accurate US Entry Face Fixed** - see page ST5:090



▲ **Accurate US Entry Bolt Fixed** - see page ST5:130